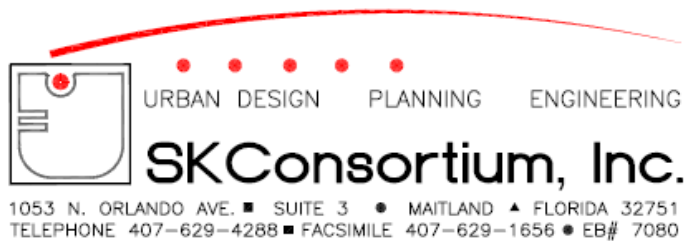

IFB NO. Y17-714-CC
INVITATION FOR BIDS
FOR
SEAWALL REPAIR AT KELLY PARK

PART H
TECHNICAL SPECIFICATIONS

VOLUME II



e

TABLE OF CONTENTS

Kelly Park Seawall Repair
ORANGE COUNTY, FLORIDA

DIVISION 1 GENERAL REQUIREMENTS

Section 01001	Project Directory
Section 01005	Administrative Provisions
Section 01010	Summary of the Work
Section 01027	Application for Payment
Section 01035	Modification Procedures
Section 01040	Project Coordination
Section 01045	Cutting & Patching
Section 01070	Abbreviations
Section 01095	Reference Standards and Definitions
Section 01200	Project Meetings
Section 01300	Submittals
Section 01500	Temporary Facilities
Section 01600	Materials and Equipment
Section 01631	Products Substitutions
Section 01700	Project Close-out
Section 01740	Warranties and Bonds

DIVISION 2- SITE WORK

Section 02270	Erosion & Sedimentation
Section 03300	Cast-in Place Concrete

SECTION 01001 - PROJECT DIRECTORY

Prime Consultant/Civil Eng.

S.K. Consortium, Inc.
1053 North Orlando Avenue
Suite 3
Maitland, Florida 32751
(407) 629-4288 / Fax (407) 629-1656

END SECTION - 01001

SECTION 01005-ADMINISTRATIVE PROVISIONS

PART I GENERAL

1.01 WORK COVERED BY CONTRACT DOCUMENTS

- A. Contractor is responsible to perform all tasks specified in the contract documents. The project description repair of existing seawall and other site improvements to stabilize the project area.

1.02 CONTRACT METHOD

- A. Construct the work under a single lump sum contract (or as otherwise defined in bid documents).

1.03 COORDINATION

- A. Coordinate work of the various Sections of Specifications to assure efficient and orderly sequence of installation of construction elements, with provisions for accommodating items installed later.
- B. Verify characteristics of elements of interrelated operating equipment are compatible; coordinate work of various Sections having interdependent responsibilities for installing, connecting to and placing in service such equipment. Differences shall be brought to the Owner's attention during bid process or remain the responsibility of the Contractor.
- C. Coordinate space requirements and installation of items, such as but not limited to, mechanical, plumbing, systems and electrical work, which are indicated diagrammatically or otherwise on drawings. Follow routing shown for pipes, ducts and conduits, as closely as practicable; make runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for facility maintenance and for future repairs.
- D. In finished areas (except as otherwise shown), conceal pipes, ducts, and wiring in the construction. Coordinate locations of fixtures and outlets with finish elements.
- E. Execute cutting and patching to integrate elements of work, uncover ill timed, defective and nonconforming work, provide openings for penetrations of existing surfaces and provide samples as specified in individual sections for testing. Seal penetrations through floors, walls and ceilings, and fire safe where necessary as part of the lump sum price.

1.04 FIELD ENGINEERING SURVEYING

- A. Provide field engineering surveying services; establish grades, lines and levels,

by use of engineering survey practices recognized as standard by the survey industry. Said work shall be required to be provided by a Professional Land Surveyor, registered as such in the State of Florida.

- B. Payment for all necessary survey work shall be included in the bid as part of other items of work.”

1.05 REFERENCE STANDARDS

- A. For products specified by association or trade standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.
- B. The date of the standard is that in effect when a specified date is specified and if no date is specified, use the latest edition.
- C. Obtain copies of referenced standards listed in individual specification sections. Maintain copy at job site during progress of the specific work.

END OF SECTION 01005

SECTION 01010-SUMMARY OF WORK

PART 1 GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division-1 Specification Sections, apply to this Section.

1.02 PROJECT DESCRIPTION

- A. Performance of all tasks specified in the contract documents shall be the responsibility of the contractor unless specified otherwise. The description of the project includes repair of existing concrete seawall including placement of new sheet piling and concrete tie beams.

1.03 WORK UNDER OTHER CONTRACTS

- A. Separate contracts may be issued to perform certain construction operations at the site.

1.04 BUILDING/SITE SECURITY

- A. The construction limits shall be secured by the General Contractor from unwarranted entry at the end of each day.
- B. The construction limits shall be secured by means of a construction fence or barrier to prevent access by park users.

1.05 CONTRACTOR USE OF PREMISES

- A. General: During the construction period the Contractor shall have full use of the premises for construction operations, including use of the site. The Contractor's use of the premises is limited only by the Owners right to perform construction operations with the own forces or to employ separate contractors on portions of the project.
- B. General: Limit use of the premises to construction activities in areas indicated within the limit of the premises the Contractor may use any portion of the site for storage or work areas or any legal purpose.
 - 1. Confine operations to areas within Contract limits indicated on the Drawings. Portions of the site beyond areas in which construction operations are indicated are not to be disturbed.
 - 2. Keep driveways and entrances serving the premises clear and available to the Owner and the Owners employees at all times. Do not use these areas for parking or storage of materials.

3. Burial of Waste Materials: Do not dispose of construction debris, vegetation and hazardous material on site, either by burial or by burning.

1.06 DISTRIBUTION OF RELATED DOCUMENTS

- A. The Contractor is solely responsible for the distribution of ALL related documents/drawings/specifications to ALL appropriate vendors/subcontractors to insure proper coordination of all aspects of the project and its related parts during bidding and construction.

1.07 CONTRACT DOCUMENT FILE

- A. Copies of the Contract Documents, Plans, Specifications, Addenda, Change Orders, Architects Supplemental Instructions, approved Shop Drawings, Substitution Approvals, etc. shall be placed and maintained in the Contractors field office at the project site by the Contractor throughout the entire contract period. Said these documents shall be filed in a manner that allows for ease of retrieval. Documents shall be made available to the Architect/Engineer and the County's representatives throughout this same period.

PART 2 PRODUCTS

2.01 ASBESTOS FREE MATERIAL

- A. Contractor shall provide a written and notarized statement on company letterhead(s) to certify and warrant that ONLY ASBESTOS FREE MATERIALS AND PRODUCTS were provided as required in this section. Such statement shall be submitted with the final payment request. Final payment shall not be made until such statement is submitted. Contractor agrees that if materials containing asbestos are subsequently discovered at any future time to have been included in the construction, the contractor shall be liable for all costs related to the redesign or modification on the construction of the project so that materials containing asbestos are removed from the facility. If construction has begun or has been completed pursuant to a design that includes asbestos containing materials, the Contractor shall also be liable for all costs related to the abatement of such asbestos.

PART 3 EXECUTION (Not applicable).

END OF SECTION 01010

SECTION 01027- APPLICATION FOR PAYMENT

PART I GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division-1 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section specifies administrative and procedural requirements governing the Contractors Applications for Payment.
- B. The Contractors Construction Schedule and Submittal Schedule are included in Section 01300 - SUBMITTALS.

1.03 SCHEDULE OF VALUES

- A. Coordinate preparation of the Schedule of Values with preparation of Contractors Construction Schedule.
 - 1. Submit the Schedule of Values to the Owner at the earliest feasible date, but in no case later than Preconstruction Meeting. Refer to Section 01200.
 - 2. Sub-Schedules: Where the Work is separated into phases that require separately phased payments, provide sub-schedules showing values correlated with each phase of payment.
- B. Format and Content: Use the Project Manual Table of Contents as a guide to establish the format for the Schedule of Values.
 - 1. Identification: Include the following Project identification on the Schedule of Values:
 - a. Project name and location.
 - b. Name of the Architect
 - c. Project Number
 - d. Contractors Name and Address
 - e. Date of Submittal
 - 2. Arrange the Schedule of Values in a tabular form with separate columns to indicate the following for each item listed:

- a. Generic Name
 - b. Related Specification Section
 - c. Change Orders (numbers) that have affected value
 - d. Dollar Value
 - e. Percentage of Contract Sum to the nearest one-hundredth percent, adjusted to total 100 percent
3. Provide a breakdown of the Contract Sum in sufficient detail to facilitate continued evaluation of Applications for Payment and progress reports. Break principal subcontract amounts down into several line items:
- a. A value will be given for at least every major specification section (subsections can logically be grouped together).
 - b. A single material subcontractor (i.e. sod, window blinds) will not be required to be broken down into labor and material unless it is anticipated the materials will be stored and invoiced prior to installation.
 - c. All multiple item subcontracts or work items (i.e. concrete, roofing, painting, mechanical, electrical items, etc.) will be shown broken down at least in labor and material (all taxes, burden and overhead and profit included).
 - d. Mobilization (move-on, bond, insurance, temporary office and sanitary service installation) shall not exceed 2 1/2% of contract price.
 - f. Concrete broken down at least into foundation, slab on grade, columns, beams and suspended slabs.
 - g. Masonry divided into C.M.U. stem walls, exterior walls, interior walls.
 - h. Plumbing broken down at least into underslab rough-in, vents and stacks, supply piping, equipment items (each listed separately), fixtures and trim.
 - i. HVAC: Typically shown per specification section, labor and material, per floor.
 - j. Electrical: same as HVAC.
 - k. Fire protection broken down at least into underground, rough-in and trim. Labor and material.
 - l. Logical grouping of specification subsections are permitted.
4. Round amounts off the nearest whole dollar; the total shall equal the Contract Sum.
5. For each part of the Work where an Application for Payment may include materials or equipment, purchased or fabricated and stored, but not yet installed, provide separate line items on the Schedule of

Values for initial cost of the materials, for each subsequent stage of completion, and for total installed value of that part of the Work.

6. Margins of Cost: Show line items for indirect costs, and margins on actual costs, only to the extent that such items will be listed individually in Applications for Payment. Each item in the Schedule of Values and Applications for Payment shall be complete including its total cost and proportionate share of general overhead and profit margin.
 - a. At the Contractors option, temporary facilities and other major cost items that are not direct cost of actual work-in place may be shown as separate line items in the Schedule of Values or distributed as general overhead expense.
7. Schedule Updating: Update and resubmit the Schedule of Values when Change Orders or Construction Change Directives result in a change in the contract sum.

1.04 APPLICATIONS FOR PAYMENT

- A. Each Application for Payment shall be consistent with previous applications and payments as reviewed by the Owners Representative and paid for by the Owner.
 1. The initial Application for Payment, the Application for Payment at time of Substantial Completion, and the Final Application for Payment involve additional requirements. See items G, I, J and K of this section.
- B. Payment Application Times: The period of construction Work covered by each Application of Payment is the period indicated in the Agreement.
- C. Payment Application Forms: Use the County's most updated Form as the form for Application for Payment. Form given at the Preconstruction Conference.
- D. Application Preparation: Complete every entry on the form, including notarization and execution by person authorized to sign legal documents on behalf of the Owner. Incomplete applications will be returned without action.
 1. Entries shall match data on the Schedule of Values and Contractors Construction Schedule. Use updated schedules if revisions have been made.

2. Include amounts of Change Orders and Construction Change Directives issued to the last day of the construction period covered by the application.
- E. Transmittal: Submit six (6) original executed copies of each Application for Payment to the Project Manager by means ensuring receipt within 24 hours; one copy shall be complete, including waivers of lien and similar attachments, when required.
1. Transmit each copy with a transmittal form listing attachments, and recording appropriate information related to the application in a manner acceptable to the Project Manager.
- F. Initial Application for Payment: Administrative actions and submittals that must precede or coincide with submittal of the first Application for Payment include the following:
1. List of principal subcontractors
 2. List of principal suppliers and fabricators
 3. Schedule of Values
 4. Approved Contractors Construction Schedule (preliminary if not final)
 5. Schedule of principal products
 6. Schedule of unit prices (if applicable)
 7. Submittal schedule (preliminary if not final)
 8. List of Contractors staff assignments
 9. List of Contractors principal consultants
 10. Copies of building permits for trades requiring separate permits
 11. Copies of authorizations and licenses from governing authorities for performance of the Work
 12. Initial progress report
 13. Report of Pre-Construction Meeting
 14. Initial settlement survey and damage report, if required
 15. Listing of all long lead procurement items monthly applications for payment will be accompanied with updated schedule and review of as-built drawings.
- G. Interim Application for Payment: Payment will be processed once a month. No applications will be processed without receipt of previous months waiver of lien described in subsection F above. Payment for item will be based on percentage completed as determined and approved by the County Project Manager or invoice for stored materials. Retainage (10%) will be held for all interim applications.
- H. Applications for Payment at Substantial Completion: Following issuance of

the Certificate of Substantial Completion, submit an Application for Payment; this application shall reflect any Certificates of partial Substantial Completion issued previously for Owner occupancy of designated portions of the Work. Application shall also include all items listed in Part H above.

- I. Administrative actions and submittals that shall proceed or coincide with Substantial Completion Payment. Substantial Completion as defined per General Conditions Section F application include:
 1. Occupancy permits and similar approvals
 2. Warranties (guarantees) and maintenance agreements
 3. Test/adjust/balance records
 4. Maintenance instructions
 5. Start-up performance reports
 6. Change-over information related to Owners occupancy, use, operation and maintenance
 7. Final cleaning
 8. Application for reduction of retainage, and consent of surety
 9. List of incomplete Work, recognized as exceptions to Project Managers Certificate of Substantial Completion

- J. Final Payment Application: Administrative actions and submittals which must precede or coincide with submittal of the final payment Application for Payment include the following:
 1. Completion of Project Close-out requirements
 2. Completion of items specified for completion after Substantial Completion
 3. Assurance that unsettled claims will be settled
 4. Assurance that all work has been completed and accepted
 5. Proof that taxes, fees and similar obligations have been paid
 6. Removal of temporary facilities and services
 7. Removal of surplus materials, rubbish and similar elements

 8. Change of door locks to Owners access

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION (Not Applicable)

END OF SECTION 01027

SECTION 01035 - MODIFICATION PROCEDURES

PART 1 GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this section.

1.02 SUMMARY

- A. This section specifies administrative and procedural requirements for handling and processing Contract modifications.
- B. Related Sections: The following sections contain requirements that relate to this section:
 - 1. Division 1 Section 01300 Submittals for requirements for the Contractors Construction Schedule.
 - 2. Division 1 Section 01027 Application for Payment for administrative procedures governing applications for payment.
 - 3. Division 1 Section 01631 Product Substitutions for administrative procedures for handling requests for substitutions made after award of the Contract.

1.03 MINOR CHANGES IN THE WORK

- A. Supplemental instructions authorizing minor changes in the Work, not involving an adjustment to the Contract Sum or Contract Time, will be issued by the Project Manager.

1.04 CHANGE ORDER PROPOSAL REQUESTS

- A. Owner-Initiated Proposal Requests: Proposed changes in the Work that will require adjustment to the Contract Sum or Contract Time will be issued by the Project Manager, with a detailed description of the proposed change and supplemental or revised Drawings and Specifications, if necessary.
 - 1. Proposal requests, issued by the Project Manager, are for information only. Do not consider them instruction either to stop work in progress, or to execute the proposed change.

2. Unless otherwise indicated in the proposal request, within 7 days of receipt of the proposal request, submit to the Project Manager from the Owners review, an estimate of cost necessary to execute the proposed change.
 - a. Include a list of quantities of products to be purchased and unit costs, along with the total amount of purchases to be made. Where requested, furnish survey data to substantiate quantities.
 - b. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
 - c. Include a statement indicating the effect the proposed change in the Work will have on the Contract Time.
 - d. Contractor and subcontractors will provide a complete detailed labor of material breakdown to justify change order request amount.

- B. Contractor-Initiated Change Order Proposal Requests: When latent or other unforeseen conditions in mutual accord with the Owner Representatives findings require modifications to the Contract, the Contractor may propose changes by submitting a request for a change to the Architect.
 1. Include a statement outlining the reasons for the change and the effect of the change on the Work. Provide a complete description of the proposed change. Indicate the effect of the proposed change on the Contract Sum and Contract Time.
 2. Include a list of quantities of products to be purchased and unit costs along with the total amount of purchases to be made. Where requested, furnish survey data to substantiate quantities.
 3. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
 4. Comply with requirements in Section 01631 AProduct Substitutions if the proposed change in the Work requires the substitution of one product or system for a product or system not specified.
 5. Contractor and subcontractors will provide a complete detailed labor and material breakdown to justify change order request amounts.

- C. Proposal Request Form: Project Manager will transfer the information to the appropriate forms for approval. Use AIA Document G 709 for Change

Order Proposal Requests.

- D. Proposal Request Form: Use forms provided by the Owner for Change Order Proposals.

1.05 CONSTRUCTION CHANGE DIRECTIVE

- A. Construction Change Directive: When the Owner and Contractor are not in total agreement on the terms of a Change Order Proposal Request, the Project Manager may issue a Construction Change Directive instructing the Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order.
 - 1. The Construction Change Directive will contain a complete description of the change in the Work and designate the method to be followed to determine change in the Contract Sum or Contract Time.
- B. Documentation: Maintain detailed records on a time and material basis of work required by the Construction Change Directive.
 - 1. After completion of the change, submit an itemized account and supporting data necessary to substantiate cost and time adjustments to the Contract.

1.06 CHANGE ORDER PROCEDURES

- A. Upon the Owners approval of a Change Order Proposal Request, the Project Manager will issue a Change Order for signatures of the Owner and Contractor on County's Change Order form, as provided in the Conditions of the Contract.

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION (Not Applicable)

END OF SECTION 01035

SECTION 01040 - PROJECT COORDINATION

PART 1 GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division 1 Specification Sections apply to this Section.

1.02 SUMMARY

- A. This Section specifies administrative and supervisory requirements necessary for Project coordination including, but not necessarily limited to:
 - 1. Coordination
 - 2. Administrative and supervisory personnel
 - 3. General installation provisions
 - 4. Cleaning and protection
- B. Progress meetings, coordination meetings and pre-installation conferences are included in Section 01200 Project Meetings.
- C. Requirements for the Contractors Construction Schedule are included in Section 01300 Submittals.

1.03 COORDINATION

- A. Coordination: Coordinate construction activities included under various Sections of these Specifications to assure efficient and orderly installation of each part of the Work. Coordinate construction operations included under different Sections of the Specifications that are dependent upon each other for proper installation, connection, and operation.
 - 1. Where installation of one part of the Work is dependent on installation of other components, either before or after its own installation, schedule construction activities in the sequence required to obtain the best results.
 - 2. Where availability of space is limited, coordinate installation of different components to assure maximum accessibility for required maintenance, service and repair.
 - 3. Make adequate provisions to accommodate items scheduled for later installation.

- B. Where necessary, prepare memoranda for distribution to each party involved outlining special procedures required for coordination. Include such items as required notices, reports, and attendance at meetings.
 - 1. Prepare similar memoranda for the Owner and separate Contractors where coordination of their Work is required.
- C. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities to avoid conflicts and ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:
 - 1. Preparation of Schedules
 - 2. Installation and removal of temporary facilities
 - 3. Delivery and processing of submittals
 - 4. Progress meetings
 - 5. Project Close-out activities
- D. Conservation: Coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials.
 - 1. Salvage materials and equipment (if any) involved in performance of, but not actually incorporated in, the Work.
- E. Lack of coordination as specified in this and other sections of the contract documents in grounds for assessment of back charges and/or termination in order to remediate the situation.

1.04 SUBMITTALS

- A. Coordination Drawings: Prepare and submit coordination Drawings where close and careful coordination is required for installation of products and materials fabricated off-site by separate entities, and where limited space availability necessitates maximum utilization of space for efficient installation of different components.
 - 1. Show the interrelationship of components shown on separate Shop Drawings.
 - 2. Indicate required installation sequences.
 - 3. Comply with requirements contained in Section 01300 Submittals.

- B. Staff Names: At the Preconstruction Conference submit a list of the Contractors principal staff assignments, including the Superintendent and other personnel in attendance at the site; identify individuals, their duties and responsibilities; list their addresses and telephone numbers.

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION

3.01 GENERAL INSTALLATION PROVISIONS

- A. Inspection of Conditions: Require the Installer of each major component to inspect both the substrate and conditions under which work is to be performed. Do not proceed until unsatisfactory conditions have been corrected in an acceptable manner.
- B. Manufacturers Instructions: Comply with manufacturer's installation instructions and recommendations, to the extent that those instructions and recommendations are more explicit or stringent than requirements contained in Contract Documents.
- C. Inspect materials or equipment immediately upon delivery and again prior to installation. Reject damaged and defective items.
- D. Provide attachment and connection devices and methods necessary for securing Work. Secure Work true to line and level. Allow for expansion and building movement.
- E. Visual Effects: Provide uniform joint widths in exposed work. Arrange joints in exposed Work to obtain the best visual effect. Refer questionable choices to Project Manager for final decision.
- F. Recheck measurements and dimensions, before starting each installation.
- G. Install each component during weather conditions and Project status that will ensure the best possible results. Isolate each part of the completed construction from incompatible material as necessary to prevent deterioration.
- H. Coordinate temporary enclosures with required inspections and tests, to minimize the necessity of uncovering completed construction for that purpose.
- I. Mounting Heights: Where mounting heights are not indicated, install individual components at standard mounting heights recognized within the industry for the particular application indicated. Refer questionable

mounting height decisions to the Architect/Project Manager for final decision.

3.02 CLEANING AND PROTECTION

- A. During handling and installation, clean and protect construction in progress and adjoining materials in place. Apply protective covering where required to ensure protection from damage or deterioration at Substantial Completion.
- B. Clean and maintain completed construction as directed by the Project Manager and as frequently as necessary to insure its integrity and safety through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.
- C. Limiting Exposures: Supervise construction activities to ensure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period. Where the applicable, such exposures include, but are not limited to, the following:
 - 1. Excessive static or dynamic loading
 - 2. Excessively high or low temperatures
 - 3. Excessively high or low humidity
 - 4. Air contamination or pollution
 - 5. Water
 - 6. Solvents
 - 7. Chemicals
 - 8. Soiling, staining and corrosion
 - 9. Rodent and insect infestation
 - 10. Combustion
 - 11. Destructive testing
 - 12. Misalignment
 - 13. Excessive weathering
 - 14. Unprotected storage
 - 15. Improper shipping or handling
 - 16. Theft
 - 17. Vandalism

END OF SECTION 01040

SECTION 01045 - CUTTING AND PATCHING

PART 1 GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section specifies administrative and procedural requirements for cutting and patching.
- B. Refer to other Sections for specific requirements and limitations applicable to cutting and patching individual parts of the Work.

1.03 SUBMITTALS

- A. Cutting and Patching Proposal: Where approval of procedures for cutting and patching is required before proceeding, submit a proposal describing procedures well in advance of the time cutting and patching will be performed and request approval to proceed. Include the following information, as applicable, in the proposal:
 - 1. Describe the extent of cutting and patching required and how it is to be performed; indicate why it cannot be avoided.
 - 2. Describe anticipated results in terms of changes to existing construction; include changes to structural elements and operating components as well as changes in the buildings appearance and other significant visual elements.
 - 3. List products to be used and firms or entities that will perform Work.
 - 4. Indicate dates when cutting and patching is to be performed.
 - 5. List utilities that will be disturbed or affected, including those that will be relocated and those that will be temporarily out-of-service. Indicate how long service will be disrupted.
 - 6. Where cutting and patching involves addition of reinforcement to structural elements, submit details and engineering calculations to show how reinforcement is integrated with the original structure.

7. Approval by the Architect to proceed with cutting and patching does not waive the Architect's right to later require complete removal and replacement of a part of the Work found to be unsatisfactory.

1.04 QUALITY ASSURANCE

- A. Requirements for Structural Work: Do not cut and patch structural elements in a manner that would reduce their load carrying capacity or load-deflection ratio.
 1. Obtain written approval of the cutting and patching proposal before cutting and patching the following structural elements.
 - a. Foundation construction
 - b. Bearing and retaining walls
 - c. Structural concrete
 - d. Structural steel
 - e. Lintels
 - f. Timber and primary wood framing
 - g. Structural decking
 - h. Miscellaneous structural metals
 - i. Stair systems
 - j. Exterior curtain wall construction
 - k. Equipment supports
 - l. Piping, ductwork, vessels and equipment
 - m. Structural systems of special construction in Division 13.
- B. Operational and Safety Limitations: Do not cut and patch operating elements or safety related components in a manner that would result in reducing their capacity to perform as intended, or result in increased maintenance, or decreased operational life or safety. Refer to Divisions 15 and 16 regarding Fire Rated Penetrations.
 1. Obtain approval of the cutting and patching proposal before cutting and patching the following operating elements or safety related systems.
 - a. Shoring, bracing and sheeting
 - b. Primary operational systems and equipment
 - c. Air or smoke barriers
 - d. Water, moisture, or vapor barriers
 - e. Membranes and flashings
 - f. Fire protection systems
 - g. Noise and vibration control elements and systems
 - h. Control systems

- I. Communication systems
 - j. Conveying systems
 - k. Electrical wiring systems
 - l. Special construction specified by Division 13 Sections
- C. Visual Requirements: Do not cut and patch construction exposed on the exterior or in occupied spaces, in a manner that would, in the Architects opinion, reduce the buildings aesthetic qualities, or result in visual evidence of cutting and patching. Remove and replace Work cut and patched in a visually unsatisfactory manner.
- 1. If possible retain the original installer or fabricator to cut and patch the following categories or exposed Work, or if it is not possible to engage the original installer or fabricator, engage another recognized experienced and specialized firm:
 - a. Processed concrete finishes
 - b. Preformed metal panels
 - c. Window wall system
 - d. Stucco and ornamental plaster
 - e. Acoustical ceilings
 - f. Carpeting
 - g. Wall covering
 - h. HVAC enclosures, cabinets or covers
 - l. Roofing systems

PART 2 PRODUCTS

2.01 MATERIALS

- A. Use materials that are identical to existing materials. If identical materials are not available or cannot be used where exposed surfaces are involved, use materials that match existing adjacent surfaces to the fullest extent possible with regard to visual effect unless otherwise indicated by Architect/Owner. Use materials whose installed performance will equal or surpass that of existing materials.

PART 3 EXECUTION

3.01 INSPECTION

- A. Before cutting existing surfaces, examine surfaces to be cut and patched and conditions under which cutting and patching is to be performed. Take corrective action before proceeding, if unsafe or unsatisfactory conditions are encountered.
 - 1. Before proceeding, meet at the site with all parties involved in cutting and patching, including mechanical and electrical trades.

Review areas of potential interference and conflict. Coordinate procedures and resolve potential conflicts before proceeding.

3.02 PREPARATION

- A. Temporary Support: Provide temporary support of Work to be cut.
- B. Protection: Protect existing construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of the Project that might be exposed during cutting and patching operations.
- C. Avoid interference with use of adjoining areas and interruption of free passage to adjoining areas.
- D. Take all precautions necessary to avoid cutting existing pipe, conduit or ductwork serving the building, but scheduled to be removed or relocated until provisions have been made to bypass them.

3.03 PERFORMANCE

- A. General: Employ skilled workmen to perform cutting and patching. Proceed with cutting and patching at the earliest feasible time and complete without delay.
 - 1. Cut existing construction to provide for installation of other components or performance of other construction activities and the subsequent fitting and patching required to restore surfaces to their original condition.
- B. Cutting: Cut existing construction using methods least likely to damage elements to be retained or adjoining construction. Where possible review proposed procedures with the original installer; comply with the original installers recommendations.
 - 1. In general, where cutting is required use hand or small power tools designed for sawing or grinding, not hammering and chopping. Cut holes and slots neatly to size required with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
 - 2. To avoid marring existing finished surfaces, cut or drill from the exposed or finished side into concealed surfaces.
 - 3. Cut through concrete and masonry using a cutting machine such as a Carborundum saw or diamond core drill.
 - 4. Comply with requirements of applicable Sections of Division 2

where cutting and patching requires excavating and backfilling.

5. By-pass utility services such as pipe or conduit, before cutting, where services are shown or required to be removed. Cap, valve or plug and seal the remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after by-passing and cutting.
- C. Patching: Patch with durable seams that are as invisible as possible. Comply with specified tolerances.
1. Where feasible, inspect and test patched areas to demonstrate integrity of the installation.
 2. Restore exposed finishes of patched areas and extend finish restoration into retained adjoining construction in a manner that will eliminate evidence of patching and refinishing.
 3. Where removal of walls or partitions extends one finished area into another, patch and repair floor and wall surfaces in the new space to provide an even surface of uniform color and appearance. Remove existing floor and wall coverings and replace with new materials if necessary to achieve uniform color and appearance.
 - a. Where patching occurs in a smooth painted surfaces, extend final coat over entire unbroken surfaces containing the patch, after the patched area has received primer and second coat.

3.04 CLEANING

- A. Thoroughly clean area and spaces where cutting and patching is performed or used as access. Remove completely paint, mortar, oils, putty and items of similar nature. Thoroughly clean piping, conduit and similar features before painting or other finishing is applied. Restore damaged materials to their original condition.

END OF SECTION 01045

SECTION -01070 ABBREVIATIONS**PART 1 GENERAL****A. General:**

A	Area Square Feet; Ampere
AAMA	Architectural Minimum Manufacturer's Association
ABS	Acrylonitrile Butadiene Styrene
A.C.	Alternating Current; Air conditioning; Plywood Grade A & C
A.B.	Anchor Belt
A.C.I.	American Concrete Institute
Acous.	Acoustical
AD	Plywood, Grade A & D
A.D.	Area Drain
Adh.	Adhesive
Addit	Additional
Adj.	Adjustable
af	Audio-frequency
Aff	Above Finished Floor
Afg	Above Finished Grade
A.G.A.	American Gas Association
Agg.	Aggregate
A.H.	Ampere Hours
A hr.	Ampere-hour
A.H.U.	Air Handling Unit
A.I.A.	American Institute of Architects
A.I.C.	Alternating Interrupting Capacity
AIC	Ampere Interrupting Capacity
AISC	American Institute of Steel Construction
Allow.	Allowance
ALT.	Alternate
Alt.	Altitude
Alum.	Aluminum
a.m.	Ante Meridiem
Amp.	Ampere
Anc.	Anchor
Anod.	Anodized
ANSCI	American National Standards Institute
A.P.	Access Panel
Appd.	Approved
Approx.	Approximately
Apt.	Apartment

Arch.	Architectural
Asb.	Asbestos
A.S.B.C.	American Standard Building Code
A.S.H.R.A.E.	American Society of Heating, Refrig. & AC Engineers
A.S.M.E.	American Society of Mechanical Engineers
A.S.T.M.	American Society for Testing and Materials
Attchmt.	Attachment
Auto.	Automatic
Avg.	Average
A.W.G.	American Wire Gauge
AWI	American Wood Institute
AWS	American Welding Society
Bbl.	Barrel
B.C.	Bare Copper
B.& B.	Grade B. and Better;Balled and Burlapped
B.& S.	Bell and Spigot
B.& W.	Black and White
b.c.c.	Body-centered Cubic
Bd	Board
BE	Bevel End
B.F.	Board Feet
BF.	Bottom Face
Bg. Cem	Bag of Cement
BHP	Boiler Horsepower, Brake Horsepower
B.I.	Black Iron
Bit. ;Bitum	Bituminous
Bk.	Backed
Bkrs.	Breakers
Bldg.	Building
Blk.	Block
Blkg.	Blocking
Bm.	Beam
B.M.	Benchmark
B.O.C.	Bottom of Curb
BOT.	Bottom
Boil.	Boilermaker
B.P.M.	Blows Per Minute
BR	Bedroom
Brg.	Bearing
Brhe.	Bricklayer Helper
Bric.	Bricklayer
Brk.	Brick
Brkt.	Bracket
Brng.	Bearing
Brs.	Brass
Brz.	Bronze

Bsmt.	Basement
Bsn.	Basin
Btr.	Better
BTU	British Thermal Unit
BTUH	BTU per hour
Btwn.	Between
B.U.R.	Built up Roofing
BX	Interlocked Armored Cable
c	Conductivity
C	Hundred; Centigrade
C.	Course
C/C	Center to Center
Cab.	Cabinet
Cair.	Air Tool Laborer
Calc.	Calculated
Cap.	Capacity
Carp.	Carpenter
C.B.	Circuit Breaker
C.BD.	Chalk Board
C.C.A.	Chromate Copper Arsenate
C.C.F.	Hundred Cubic Feet
cd	Candela
cd/sf	Candela per Square Feet
CD	Grade of Plywood Face & Back
CDX	Plywood, grade C & D, exterior glue
Cefi.	Cement Finisher
Cem.	Cement
Cer.	Ceramic
CF	Hundred Feet
C.F.	Cubic Feet
CFM	Cubic Feet per Minute
c.g.	Center of Gravity
CG	Corner Guard
CHW	Chilled Water
C.I.	Cast Iron
C.I.P.	Cast in Place
Circ.	Circuit
C.J.	Control Unit
C.L.	Carload Lot
Clab.	Common Laborer
Clec.	Clock Equipment Cabinet
C.L.F.	Hundred Linear Feet
CLF	Current Limiting Fuse
Clg.	Ceiling
Clkg.	Caulking
Clo.	Closed
CLP	Cross Linked Polyethylene

Clr.	Clear
cm	Centimeter
CMP	Corr. Metal Pipe
C.M.U.	Concrete Masonry Unit
Cntr.	Counter
C.O.	Cleanout
Col.	Column
Conn.	Connection
Cont.	Continuous
Cont.	Contractor
C.Opng.	Cased Opening
CO2	Carbon Dioxide
Comb.	Combination
Compr.	Compressor
Conc.	Continuous; Continued
Cond.	Conductor
Corr.	Corrugated
Cos	Cosine
Cot	Cotangent
Cov.	Cover
CPA	Control Point Adjustment
Cplg.	Coupling
C.P.M.	Critical Path Method
CPVC	Chlorinated Polyvinyl Chloride
C.Pr.	Hundred Pair
CRC	Cold Rolled Channel
Creos.	Creosote
Crpt.	Carpet & Linoleum Layer
CRT	Cathode Ray Tube
CS	Carbon Steel
Csc	Cosecant
C.S.F.	Hundred Square Feet
CSI	Construction Specifications Institute
C.T.	Current Transformer
CTS	Copper Tube Size
Cu	Cubic
Cu. Ft.	Cubic Foot
cw	Continuous Wave
C.W.	Cool White; Cold Water
C. Wall	Curtain Wall
Cwt.	100 Pounds
C.W.X.	Cool White Deluxe
C.Y.	Cubic Yard (27 cubic feet)
C.Y./Hr.	Cubic Yard per Hour
Cyl.	Cylinder
d	Penny (nail size)
D	Deep; Depth; Discharge

Dis; Disch	Discharge
Db.	Decibel
Dbl.	Double
DC	Direct Current
Demob.	Demobilization
d.f.u.	Drainage Fixture Units
D.H.	Double Hang
DHU	Domestic Hot Water
Diag.	Diagonal
Diam.	Diameter
Distrib.	Distribution
Dk.	Deck
D.L.	Deck Load
Do.	Ditto
Dp.	Depth
D.P.S.T.	Double Pole, Single Throw
Dr.	Driver
Drink.	Drinking
D.S.	Double Strength
D.S.A.	Double Strength A Grade
D.S.B.	Double Strength B Grade
Dty.	Duty
DWV	Drain Waste Vent
DX	Deluxe White, Direct Expansion
dyn	Dynbe
e	Eccentricity
E	Equipment only; East
Ea	Each
E.B.	Encased Burial
Econ.	Economy
EDP	Electronic Data Processing
E.D.R.	Equiv. Direct Radiation
Eq.	Equation
Elec.	Electrician; Electrical
Elev.	Elevator; Elevating
EMT	Electrical Metallic Conduit; Thin Wall Conduit
Eng.	Engine
EPDM	Ethylene Propylene Diene Monomer
Eqhv.	Equip. Oper., heavy
Eqlt.	Equip. Oper., light
Eqmd.	Equip. Oper., medium
Eqmm.	Equip. Oper., Master Mechanic
Equl.	Equip. Oper., Oilers
ERW	Electric Resistance Welded
Est.	Estimated
esu	Electrostatic Units

E.W.	Each Way
EWT	Entering Water Temperature
Excav.	Excavation
Exp.	Expansion, Exposure
Ext.	Exterior
Extru.	Extrusion
f.	Fiber Stress
F	Fahrenheit; Female; Fill
Fab.	Fabricated
F.B.C.	Florida Building Code
FBGS	Fiberglass
F.C.	Foot candles
f.c.c.	Face Centered Cubic
f'c	Compressive Stress in Concrete; Extreme Compressive Stress
F.E.	Front End
FRP	Fluorinated Ethylene Propylene (Teflon)
F.G.	Flat Grain
F.H.A.	Federal Housing Administration
Fig.	Figure
Fin	Finished
Fixt.	Fixture
Fl. Oz.	Fluid Ounces
Flr.	Floor
F.M.	Frequency Modulation; Factory Mutual
Fmg.	Framing
Fndtn.	Foundation
Fori.	Foreman; Inside
Fount.	Fountain
FPM	Feet Per Minute
Fr.	Frame
F.R.	Fire Rating
FRK	Foil Reinforced Kraft
FRP	Fiberglass Reinforced Plastic
FS	Forged Steel
FSC	Cast Body; Cast Switch Box
Ft.	Foot; Feet
Ftng.	Fitting
Ftg.	Footing
Ft.Lb.	Foot Pound
Furn.	Furniture
FVNR	Full Voltage Non-Reversing
FXM	Female by Male
Fy.	Minimum Yield Stress of Steel
g	Gram
G	Gauss
Ga.	Gauge

Gal.	Gallon
Gal./Min.	Gallon Per Minute
Galv.	Galvanized
Gen.	General
G.F.I.	Ground Fault Interrupter
Glaz.	Glazier
GPD	Gallons per Day
GPH	Gallons per Hour
GPM	Gallons per Minute
GR	Grade
Gran.	Granular
Grnd.	Ground
H	High; High Strength Bar Joist; Henry
H.C.	High Capacity
H.D.	Heavy Duty; High Density
H.D.O.	High Density Overlaid
Hdr.	Header
Hdwe.	Hardware
Help.	Helper Average
HEPA	High Efficiency Particular Air Filter
Hg.	Mercury
HIC	High Interrupting Capacity
H.O.	High Output
Horiz.	Horizontal
H.P.	Horsepower; High Pressure
H.P.F.	High Power Factor
Hr.	Hour
Hrs./Day	Hours per Day
HSC	High Short Circuit
Ht.	Height
Htg.	Heating
Htrs.	Heaters
HVAC	Heating, Ventilating & Air Conditioning
Hvy.	Heavy
HW	Hot Water
Hyd.;Hydr.	Hydraulic
Hz.	Hertz (cycles)
I.	Moment of Inertia
I.C.	Interrupting Capacity
ID	Inside Diameter
I.D.	Inside Dimension; Identification
I.F.	Inside Frosted
I.M.C.	Intermediate Metal Conduit
In.	Inch
Incan.	Incandescent
Incl.	Included; Including
Int.	Interior

Inst.	Installation
Insul.	Insulation
I.P.	Iron Pipe
I.P.S.	Iron Pipe Size
I.P.T.	Iron Pipe Threaded
I.W.	Indirect Waste
J	Joule
J.I.C.	Joint Industrial Council
K	Thousand; Thousand Pounds; Heavy Wall Copper Tubing
K.A.H.	Thousand Amp. Hours
KCMIL	Thousand Circular Mils
KD	Knock Down
K.D.A.T.	Kiln Dried After Treatment
Kg	Kilogram
kG	Kilogauss
kgf	Kilogram force
kHz	Kilohertz
Kip	1000 Pounds
KJ	Kiljoule
K.L.	Effective Length Factor
Km	Kilometer
K.L.F.	Kips per Linear Foot
K.S.F.	Kips per Square Feet
K.S.I.	Kips per Square Inch
K.V.	Kilovolt
K.V.A	Kilovolt Ampere
K.V.A.R.	Kilovolt (Reactance)
KW	Kilowatt
KWh	Kilowatt-hour
L	Labor only; Length; Long; Medium Wall Copper Tubing
La.	Labor
lat	Latitude
Lath.	Lather
Lav.	Lavatory
lb,;#	Pound
L.B.	Load Bearing; L Conduit Body
L. & E.	Labor & Equipment
lb./hr.	Pounds per Hour
lb./L.F.	Pounds Per Linear Foot
L.C.L.	Less than Carload Lot
Ld.	Load
LE	Lead Equivalent
L.F.	Linear Foot
Lg.	Long; Length; Large
L. & H.	Light and Heat

L.H.	Long Span high Strength Bar Joist
L.J.	Long Span Standard Strength Bar Joist
L.L.	Live Load
L.L.D.	Lamp Lumen Depreciation
lm	Lumen
lm/sf	Lumen per Square Feet
lm/W	Lumen per Wall
L.O.A.	Length Over All
log	Logarithm
L.P.	Liquified Petroleum; Low Pressure
L.P.F.	Low Power Factor
L.R.	Long Radius
L.S.	Lump Sum
Lt.	Light
Lt.Ga	Light Gauge
L.T.L.	Less than Truckload Lot
Lt. Wt.	Lightweight
L.V.	Low Voltage
M	Thousand; Material; Male; Light Wall Copper Tubing
m/hr; M.H.	Man Hour
mA	Milliamperere
Mach	Machine
Mag. Str.	Magnetic Starter
Maint.	Maintenance
Marb.	Marble Setter
Mat. Mat'l	Material
Max	Maximum
MBF	Thousand Board Feet
MBH	Thousand BTU's per hr.
MC	Metal Clad Cable
M.C.F.	Thousand Cubic Feet
M.C.F.M.	Thousand Cubic Feet per Minute
M.C.M.	Thousand Circular Mils
M.C.P.	Motor Circuit Protector
MD	Medium Duty
M.D.O.	Medium Density Overlaid
Med.	Medium
MF	Thousand Feet
M.F.B.M.	Thousand Feet Board Measure
Mfg.	Manufacturing
Mfrs.	Manufacturers
mg	Milligram
MGD	Million Gallons per Day
MGPH	Thousand Gallons per Hour
MH:M.H.	Manhole; Metal Halide; Man-Hour
MHz	Megahertz

Mi.	Mile
MI	Malleable Iron; Mineral Insulated
mm	Millimeter
Mill.	Millwright
Min.;min.	Minimum; minute
Misc.	Miscellaneous
mi	Millimeter
M.L.F.	Thousand Linear Feet
Mo.	Month
Mobil.	Mobilization
Mog.	Mogul Base
MPH	Miles Per Hour
MPT	Male Pipe Thread
MRT	Mile Round Trip
ms	Millisecond
M.S.F.	Thousand Square Feet
Mstz.	Mosaic & Terrazzo Worker
M.S.Y.	Thousand Square Yards
Mtd.	Mounted
Mthe.	Mosaic & Terrazzo Helper
Mult.	Multi; Multiply
M.V.A.	Million Volt Amperes
M.V.A.R.	Million Volt Amperes Reactance
MV	Megavolt
MW	Megawatt
MXM	Male by Male
MYD	Thousand Yards
N	Natural; North
nA	Nanoampere
NA	Not Available; Not applicable
N.B.C.	National Building Code
NC	Normally Closed
N.F.M.A.	National Electrical Manufacturers Association
NEHB	Bolted Circuit Breaker to 600V
N.L.B.	Non-Load-Bearing
NM	Non-Metallic Cable
nm	Nanometer
No.	Number
N.O.C.	Not Otherwise Classified
Nose.	Nosing
N.P.T.	National Pipe Thread
NQOB	Bolted Circuit Breaker to 240V
N.R.C.	Noise Reduction Coefficient
N.R.S.	Non Rising Stem
ns	Nanosecond
nW	Nanowatt

OB	Opposing Blade
OC	On Center
OD	Outside Diameter
O.D.	Outside Dimension
ODS	Overhead Distribution System
O & P	Overhead and Profits
Oper.	Operator
Opng.	Opening
Orna.	Ornamental
O.S. & Y.	Outside Screw and Yoke
Ovhd.	Overhead
OWG	Oil, Water or Gas
Oz.	Ounce
P.	Pole; Applied Load; Projection
p.	Page
Pape.	Paperhanger
P.A.P.R.	Powered Air Purifying Respirator
PAR	Weatherproof Reflector
Pc.	Piece
P.C.	Portland Cement; Power Connector
P.C.M.	Phase Contrast Microscopy
P.C.F.	Pounds Per Cubic Feet
P.E.	Professional Engineer; Porcelain Enamel; Polyethylene; Plain End
Perf.	Perforated
Ph.	Phase
P.I.	Pressure Injected
Pile.	Pile Driver
pkg.	Package
Pl.	Plate
Plah.	Plaster Helper
Plas.	Plasterer
Pluh.	Plumbers Helper
Plum.	Plumber
Ply.	Plywood
p.m.	Post Meridiem
Pord.	Painter Ordinary
pp	Pages
PP;PPL	Polypropylene
P.P.M.	Parts per Million
Pr.	Pair
Prefab.	Prefabricated
Prefin.	Prefinished
Prop.	Propelled
PSF;psf	Pounds per Square Foot
PSI;psi	Pounds per Square Inch
PSIG	Pounds per Square Inch Gauge

PSP	Plastic Sever Pipe
Pspr.	Painter, Spray
Psst.	Painter, Structural Steel
P.T.	Potential Transformer
P. & T.	Pressure & Temperature
Ptd.	Painted
Ptns.	Partitions
Pu	Ultimate Load
PVC	Polyvinyl Chloride
Pvmt.	Pavement
Pwr.	Power
Q	Quantity Heat Flow
Quan.; Qty	Quantity
Q.C.	Quick Coupling
r	Radius of Gyration
R	Resistance
R.C.P.	Reinforced Concrete Pipe
Rect.	Rectangle
Reinf.	Reinforced
Req'd	Required
Res.	Resistant
Resi	Residential
Rgh.	Rough
R.H.W.	Rubber, Heat & Water Resistant; Residential Hot Water
rms	Root Mean Square
Rnd.	Round
Rodm.	Rodman
Rofc.	Roofer, Composition
Rofp.	Roofer, Prcast
Rohe.	Roofer Helpers (Composition)
Rots.	Roofer, Tile & Sale
R.O.W.	Right of Way
RPM	Revolutions per Minute
R.R.	Direct Burial Feeder Conduit
R.S.	Rapid Start
R.T.	Round Trip
S.	Suction; Single Entrance; South
Scaf.	Scaffold
Sch.;Sched.	Schedule
S.C.R.	Modular Brick
S.D.	Sound Deadening
S.D.R.	Standard Dimension Ratio
S.E.	Surfaced Edge
Sel.	Select
S.E.R.;S.E.U.	Service Entrance Cable
SF.	Square Foot

S.F.C.A.	Square Foot Contact Area
S.F.F.C.M.U.	Split Face Fluted Concrete Masonry Unit.
S.F.G.	Square Foot of Ground
S.F. Hor.	Square Foot Horizontal
S.R.F.	Square Foot of Radiation
S.F.Shlf.	Square Foot of Shelf
S4S	Surface 4 Sides
Shee.	Sheet Metal Worker
Sin.	Sine
Skwk.	Skilled Worker
S.L.	Saran Lined
S.L.	Slimline
Sldr.	Solder
S.N.	Solid Neutral
S.P.	Static Pressure; Single Pole; Self Propelled
Spri.	Sprinkler Installer
Sq.	Square; 100 Square Feet
S.P.D.T.	Single Pole, Double Throw
S.P.S.T.	Single Pole, Single Throw
SPT	Standard Pipe Thread
Sq.Hd.	Square Head
Sq.In.	Square Inch
S.S.	Single Strength; Stainless Steel
S.S.B.	Single Strength B Grade
Sswk.	Structural Steel Worker
Sswl.	Structural Steel Welder
St.;Stl.	Steel
S.T.C.	Sound Transmission Coefficient
Std.	Standard
STP	Standard Temperature & Pressure
Stpi.	Steamfitter, Pipefitter
Str.	Strength; Starter; Straight
Strd.	Stranded
Struct.	Structural
Sty.	Story
Subj.	Subject
Subs.	Subcontractors
Surf.	Surface
Sw.	Switch
Swbd.	Switchboard
S.Y.	Square Yard
Syn.	Synthetic
Sys.	System
t.	Thickness
T	Temperature; Ton
Tan	Tangent
T.C.	Terra Cotta

T & C	Threaded and Coupled
T.D.	Temperature Difference
T.E.M.	Transmission Electron Microscopy
TFE	Tetrafluoroethylene (teflon)
T.& G.	Tongue & Groove; Tar & Gravel
Th.;Thk.	Thick
Thn.	Thin
Thrded.	Threaded
Tilf.	Tile Layer Floor
Tilh.	Tile Layer Helper
THW	Insulated Strand Wire
THWN;THHN	Nylon Jacketed Wire
T.L.	Truckload
Tot.	Total
T.S.	Trigger Start
Tr.	Trade
Transf.	Transformer
Trhv.	Truck Driver, Heavy
Trir.	Trailer
Trit.	Truck Driver, Light
TV	Television
T.W.	Thermoplastic Water Resistant Wire
UCI	Uniform Construction Index
UF	Underground Feeder
U.H.F.	Ultra High Frequency
U.L.	Underwriters Laboratory
Unfin.	Unfinished
URD	Underground Residential Distribution
V	Volt
V.A.	Volt Amperes
V.C.T.	Vinyl Composition Tile
VAV	Variable Air Volume
VC	Veneer Core
Vent.	Ventilating
Vert.	Vertical
V.F.	Vinyl Faced
V.G.	Vertical Grain
V.H.F.	Very High Frequency
VHO	Very High Output
Vib.	Vibrating
V.L.F.	Vertical Linear Foot
Vol.	Volume
W	Wire; Watt; Wide; West
w/	With
W.C.	Water Column; Water Closet
W.F.	Wide Flange
W.G.	Water Gauge

Wldg.	Welding
W. Mile	Wire Mile
W.R.	Water Resistant
Wrck.	Wrecker
W.S.P.	Water Steam, Petroleum
WT, Wt.	Weight
WWF	Welded Wire Fabric
XRMR	Transformer
XHD	Extra Heavy Duty
XHHW;XLPE	Cross Linked Polyethylene Wire Insulation
Y	Wye
yd	Yard
yr	Year
Δ	Delta
%	Percent
Φ	Phase
@	At
<	Less Than
>	Greater Than

PART 2- PRODUCTS:

Not used.

PART 3- EXECUTION:

Not used.

END SECTION 01070

SECTION 01095 - REFERENCE STANDARDS AND DEFINITIONS**PART 1 GENERAL****1.01 RELATED DOCUMENTS**

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.02 DEFINITIONS

- A. General: Basic Contract definitions are included in the Conditions of the Contract.
- B. Indicated: The term Indicated refers to graphic representations, notes or schedules on the Drawings, or other Paragraphs or Schedules in the Specifications, and similar requirements in the Contract Documents. Where terms such as shown, noted, scheduled and specified are used, it is to help the reader locate the reference; no limitation on location is intended.
- C. Directed: Terms such as directed, requested, authorized, selected, approved, required, and permitted mean directed by the Project Manager, requested by the Architect/Project Manager and similar phrases.
- D. Accepted: This term; Accepted, where used in conjunction with the Architects action on the Contractors submittals, applications, and requests, is limited to the Architects duties and responsibilities as stated in the Conditions of the Contract.
- E. Regulations: The term Regulations includes laws, ordinances, statutes, and lawful orders issued by authorities having jurisdiction, as well as rules, conventions, and agreements within the construction industry that control performance of the Work.
- F. Furnish: The term furnish is used to mean supply and deliver to the Project site, ready for unloading, unpacking, assembly, installation, and similar operations.

- G. **Install:** The term install is used to describe operations at project site including the actual unloading, unpacking, assembly, erection, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning, and similar operations.
- H. **Provide:** The term provide means to furnish and install, complete and ready for the intended use.
- I. **Installer:** An Installer is the Contractor or an entity engaged by the Contractor, either as an employee, subcontractor, or contractor of lower tier for performance of a particular construction activity, including installation, erection, application, and similar operations. Installers are required to be experienced in the operations they are engaged to perform.
1. The term experienced, when used with the term Installer, means having a minimum of five previous projects similar in size and scope to this Project, being familiar with the special requirements indicated, and having complied with requirements of the authority having jurisdiction.
 2. **Trades:** Use of titles such as carpentry is not intended to imply that certain construction activities must be performed by accredited or unionized individuals of a corresponding generic name, such as carpenter. It also does not imply that requirements specified apply exclusively to trades persons of the corresponding generic name.
- J. **Project Site** is the space available to the Contractor for performance of construction activities, either exclusively or in conjunction with others performing other work as part of the Project. The extent of the Project Site is shown on the Drawings and may or may not be identical with the description of the land on which the Project is to be built.
- K. **Testing Laboratories:** testing laboratory is an independent entity engaged to perform specific inspections or tests, either at the Project site or elsewhere, and to report on and, if required, to interpret results of those inspections or tests.

1.03 SPECIFICATION FORMAT AND CONTENT EXPLANATION

- A. **Specification Format:** These Specifications are organized into Divisions and Sections based on the Construction Specifications Institutes 16 Division format and MASTER FORMAT numbering system.

- B. Specification Content: This Specification uses certain conventions in the use of language and the intended meaning of certain terms, words, and phrases when used in particular situations or circumstances. These conventions are explained as follows:
1. Abbreviated Language: Language used in Specifications and other Contract Documents is the abbreviated type. Words and meaning shall be interpreted as appropriate. Words that are implied, but not stated shall be interpolated as the sense required. Singular words will be interpreted as plural and plural words interpreted as singular where applicable and the context of the Contract Documents so indicates.
 2. Imperative and streamlined language is used generally in the Specifications. Requirements expressed in the imperative mood are to be performed by the Contractor. At certain locations in the text, for clarity, subjective language is used to describe responsibilities that must be fulfilled indirectly by the Contractor, or by others when so noted.
 - a. The words, shall be shall be included by inference wherever a colon (:) is used within a sentence or phrase.

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION (Not Applicable)

END OF SECTION 01095

SECTION 01200 - PROJECT MEETINGS

PART 1 GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section specifies administrative and procedural requirements for project meetings including but not limited to:
 - 1. Pre-Construction Conference
 - 2. Pre-Installation Conference
 - 3. Coordination Meetings
 - 4. Progress Meetings
- B. Construction schedules are specified Section 1300 Submittals.

1.03 PRE-CONSTRUCTION CONFERENCE

- A. Schedule a pre-construction Conference and organizational meeting at the project site or other convenient location no later than 20 days after execution of the agreement and prior to commencement of construction activities. Conduct the meeting to review responsibilities and personnel assignments.
- B. Attends: The OWNERS, Representative, the Contractor and its superintendent, major subcontractors, manufacturers, suppliers and other concerned parties shall each be represented at the conference by persons familiar with and authorized to conclude matters relating to the Work.
- C. Agenda: Discuss items of significance that could affect progress including such topics as:
 - 1. Tentative construction schedule
 - 2. Critical Work sequencing and/coordinating
 - 3. Designation of responsible personnel
 - 4. Procedures for processing field decisions and Change Orders
 - 5. Procedures for processing Applications for Payment
 - 6. Distribution of Contract Documents
 - 7. Submittal of Shop Drawings, Product Data and Samples.

8. Preparation of record documents
 9. Use of the Premises
 10. Office, Work and storage areas.
 11. Equipment deliveries and priorities
 12. Safety procedures
 13. First aid
 14. Security
 15. Housekeeping
 16. Working hours
- D. Contractor must submit at the time of the meeting at least the following items:
1. Schedule of Values
 2. Listing of key personnel including project superintendent and subcontractors with their addresses, telephone numbers, and emergency telephone numbers.
 3. Preliminary Construction Schedule
 4. Submittal Schedule

1.04 PRE-INSTALLATION CONFERENCE

- A. Conduct a Pre-installation conference at the site before each construction activity that requires coordination with other construction. The Installer and representatives of manufacturers and fabricators involved in or affected by the installation, and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise at least 48 hours in advance the Project Manager of scheduled meeting dates.
1. Review the progress of other construction activities and preparations for the particular activity under consideration at each pre-installation conference, including requirements for:
 - a. Contract Documents
 - b. Options
 - c. Related Change Orders
 - d. Purchases
 - e. Deliveries
 - f. Shop Drawings, Product Data and Quality Control Samples
 - g. Possible conflicts
 - h. Compatibility problems
 - i. Time schedules
 - j. Weather limitations
 - k. Manufacturers recommendations
 - l. Comparability of materials

- m. Acceptability of substrates
 - n. Temporary facilities
 - o. Space and access limitations
 - p. Governing regulations
 - q. Safety
 - r. Inspection and testing requirements
 - s. Required performance results
 - t. Recording requirements
 - u. Protection
2. Record significant discussions and agreements and disagreements of each conference along with and approved schedule. Distribute the record of the meeting to everyone. Concerned, promptly, including the Owner and Architect.
 3. Do not proceed if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of Work and reconvene the conference at the earliest feasible date.

1.05 PROGRESS MEETINGS

- A. Conduct progress meetings at the Project site at weekly intervals or more frequently if necessary as directed by the Project Manager. Notify the Owner at least 48 hours in advance of scheduled meeting time and dates. Coordinate dates of meetings with preparation of the payment request.
- B. Attendees: In addition to representatives of the Owner and Architect, each subcontractor, supplier or other entity concerned with current progress or involved in planning, coordination or performance of future activities with the Project and authorized to conclude matters relation to progress.
- C. Agenda: Review and correct or approve minutes of the previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to the current status of the Project.
 1. Contractors Construction Schedule: Review progress since the last meeting. Determine where each activity is in relation to the Contractors Construction Schedule, whether on time or ahead or behind schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.

2. Review the present and future needs of each entity present, including such items as:
 - a. Interface requirements
 - b. Time
 - c. Sequences
 - d. Deliveries
 - e. Off-site fabrication problems
 - f. Access
 - g. Site utilization
 - h. Temporary facilities and services
 - i. Hours of work
 - j. Hazards and risks
 - k. Housekeeping
 - l. Quality and work standards
 - m. Change Orders
 - n. Documentation of information for payment requests.

- D. Reporting: No later than 3 days after each progress meeting date, distribute copies of minutes of the meeting to each party present and to other parties who should have been present. Include a brief summary, in narrative form, or progress since the previous meeting and report.

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION (Not Applicable)

END OF SECTION 01200

SECTION 01300 - SUBMITTALS

PART 1 GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section specifies administrative and procedural requirements for submittals required for performance of the Work, including:
 - 1. Contractors construction schedule
 - 2. Submittal schedule
 - 3. Daily construction reports
 - 4. Shop Drawings
 - 5. Product Data
 - 6. Samples
- B. Administrative Submittals: Refer to other Division 1 Sections and other Contract Documents for requirements for administrative submittals. Such submittals include, but are not limited to:
 - 1. Permits
 - 2. Applications for payment
 - 3. Performance and payment bonds
 - 4. Insurance certificates
 - 5. List of Subcontractors with start and finish dates update as necessary
 - 6. Schedule of Values
 - 7. Construction Schedule
- C. The Schedule of Values submittal is included in Section 01027 Application for Payment.

1.03 SUBMITTAL PROCEDURES

- A. Coordination: Coordinate preparation and processing of submittals with performance of construction activities. Transmit each submittal sufficiently in advance of performance of related construction activities to avoid delay.

1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals and related activities that require sequential activity.
 2. Coordinate transmittal of different types of submittals for related elements of the Work so processing will not be delayed by the need to review submittals concurrently for coordination.
 - a. The Project Manager reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
 3. Processing: Allow sufficient review time so that installation will not be delayed as a result of the time required to process submittals, including time for resubmittals.
 - a. Allow two weeks for initial review. Allow additional time if processing must be delayed to permit coordination with subsequent submittals. The Project Manager will promptly advise the Contractor when a submittal being processed must be delayed for coordination.
 - b. If an intermediate submittal is necessary, process the same as the initial submittal.
 - c. Allow two weeks for reprocessing each submittal.
 - d. No extension of Contract Time will be authorized because of failure to transmit submittals to the Architect sufficiently in advance of the Work to permit processing.
- B. Submittal Preparation: Place a permanent label or title block on each submittal for identification. Indicate the name of the entity that prepared each submittal on the label or title block.
1. Provide a space approximately 4" x 5" on the label or beside the title block on Shop Drawings to record the Contractors review and approval markings and the action taken.
 2. Include the following information on the label for processing and recording action taken.
 - a. Project name
 - b. Date
 - c. Name and address of architect
 - d. Name and address of contractor
 - e. Name and address of subcontractor
 - f. Name and address of supplier
 - g. Name of manufacturer

- h. Number and title of appropriate Specification Section
 - i. Drawing number and detail references, as appropriate.
- C. Submittal Transmittal: Package each submittal appropriately for transmittal and handling. Transmit each submittal from Contractor to Project Manager using transmittal form as provided by the Project Manager. Submittals received from sources other than the Contractor will be returned without action.
 - 1. On the transmittal Record relevant information and requests for data. On the form, or separate sheet, record deviations from Contract Document requirements, including minor variations and limitations. Include Contractors certification that information complies with Contract Document requirements.
 - 2. Transmittal Form: As provide by the Project Manager
- D. Contractor shall be responsible for cost of re-review of rejected submittals, shop drawing, etc. Costs for re-review shall be reimbursed to the County by deducting the cost from the Contractors monthly progress payments. Costs to be determined by applying the consultants standard billing rates, plus 10% handling by the County.
- E. Substitution request to specified products will be made within 15 days of Notice to Proceed. After the 15 day period, no requests for substitution from the Contractor will be considered.
 - 1. Substitution submitted within the first 15 days will have product data from specified and requested substitute submitted together and demonstrate better quality, cost savings if of equal quality, or show benefit to the County for excepting the substitute. The contractor shall include in their bid the cost of using the specified listed products. The county will not guarantee approval of the request for substitution.

1.04 CONTRACTORS CONSTRUCTION SCHEDULE

- A. Critical Path Method (CPM) Schedule: Prepare a fully developed, horizontal bar-chart type Contractors construction schedule. Submit in accordance with Section 01200 project Meetings.
 - 1. Provide a separate time bar for each significant construction activity. Provide a continuous vertical line to identify the first working day of each week. Use the same breakdown of units of the Work as indicated in the Schedule of Values.

2. Within each time bar indicate estimated completion percentage in 10 percent increments. As Work progresses, place a contrasting mark in each bar to indicate Actual Completion.
 3. Prepare the schedule on a sheet, or series of sheets, of stable transparency, or other reproducible media, of sufficient width to show data for the entire construction period.
 4. Secure time commitments for performing critical elements of the Work from parties involved. Coordinate each element on the schedule with other construction activities; include minor elements involved in the sequence of the Work. Show each activity in proper sequence. Indicate graphically sequences necessary for completion of related portions of the Work.
 5. Coordinate the Contractors construction schedule with the schedule of values, list of subcontracts, submittal schedule, progress reports, payment request and other schedules.
 6. Indicate completion in advance of the date established for Substantial Completion. Indicate Substantial Completion on the schedule to allow time for the Architects procedures necessary for certification of Substantial Completion.
- B. Phasing: Provide notations on the schedule to show how the sequence of the Work is affected by requirements for phased completion to permit Work by separate contractors and partial occupancy by the Owner prior to Substantial Completion.
- C. Work Stages: Indicate important stages of construction for each major portion of the Work, including testing and installation.
- D. Area Separations: Provide a separate time bar to identify each major construction area for each major portion of the Work. Indicate where each element in an area must be sequenced or integrated with other activities.
- E. Cost Correlation: At the head of the schedule, provide a two item cost correlation line, indicating pre-calculated and actual costs. On the line show dollar-volume of Work performed as the dates used for preparation of payment requests.
1. Refer to Section Applications for Payment for cost reporting and payment procedures.
- F. Distribution: Following response to the initial submittal, print and distribute copies to the Architect, Owner, subcontractors, and other parties

required to comply with schedule dates. Post copies in the Project meeting room and temporary field office.

1. When revisions are made, distribute to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in construction activities.
- G. **Schedule Updating:** Revise the schedule monthly or activity, where revisions have been recognized or made. Issue the updated schedule concurrently monthly pay request.

1.05 SUBMITTAL LOG

- A. After development and acceptance of the Contractors construction schedule, prepare a complete log of submittals.
1. Coordinate submittals log with the list of subcontracts, schedule of values and the list of products as well as the Contractors construction schedule.
 2. Prepare the log in chronological order; include all submittals required. Provide the following information:
 - a. Scheduled date for the first submittal
 - b. Related Section number
 - c. Submittal category
 - d. Name of subcontractor
 - e. Description of the part of the Work covered
 - f. Scheduled date for resubmittal
 - g. Scheduled date the Architects final release or approval.
 3. All submittals must be received within the first 25% of contract time.
- B. **Distribution:** Following response to initial submittal, print and distribute copies to the Project Manager, subcontractors, and other parties required to comply with submittal dates indicated. Post copies in the Project meeting room and field office.
1. When revisions are made, distribute to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in construction activities.

- C. Log Updating: Revise the log after each meeting or activity, where revisions have been recognized or made. Issue the updated schedule concurrently with report of each meeting.

1.06 DAILY CONSTRUCTION REPORTS

- A. Prepare a daily construction report, recording the following information concerning events at the site; and submit duplicate copies to the Project Manager at weekly intervals:
 - 1. List of subcontractors at the site
 - 2. Approximate count of personnel at the site
 - 3. High and low temperatures, general weather conditions
 - 4. Accidents and unusual events
 - 5. Meetings and significant decisions
 - 6. Stoppages, delays, shortages, losses
 - 7. Meter readings and similar recordings
 - 8. Emergency procedures
 - 9. Orders and requests of governing authorities
 - 10. Change Orders received, implemented
 - 11. Services connected, disconnected
 - 12. Equipment or system tests and start-ups
 - 13. Partial completion, occupancies
 - 14. Substantial Completion authorized

1.07 SHOP DRAWINGS

- A. Submit newly prepared information, drawn to accurate scale. Highlight, encircle, or otherwise indicate deviations from the Contract Documents. Do not reproduce Contract Documents or copy standard information as the basis of Shop Drawings. Standard information prepared without specific reference to the Project is not considered a Shop Drawing and will be rejected.
- B. Shop Drawings include fabrication and installation drawings, setting diagrams, schedules, patterns, templates and similar drawings. Include the following information:
 - 1. All required dimensions
 - 2. Identification of products and materials included
 - 3. Compliance with specified standards
 - 4. Notation of coordination requirements
 - 5. Notation of dimensions established by field measurement
 - 6. Sheet Size: Except for templates, patterns and similar full-size Drawings on sheets at least 8" x 11" but no larger than 24" x 36".
 - 7. Initial Submittal: Submit one correctable translucent reproducible

- print and one blue-or black-line print for the Project Managers review; the reproducible print will be returned.
8. Initial Submittal: Submit 2 blue-or black-line prints for the Architects review; one will be returned.
 9. Final Submittal: Submit 2 blue-or black-line prints; submit 2 prints where required for maintenance manuals. 2 prints will be retained; the remainder will be returned.
 10. Final Submittal: Submit 3 blue-or black-line prints; submit 2 prints where required for maintenance manuals. 2 prints will be retained; the remainder will be returned.
 11. Do not use Shop Drawings without an appropriate final stamp indicating action taken in connections with construction.
- C. Coordination drawings are a special type of Shop Drawing that show the relationship and integration of different construction elements that require careful coordination during fabrication or installation to fit in the space provided or function as intended.
1. Preparation of coordination Drawings is specified in section Project Coordination and may include components previously shown in detail on Shop Drawings or Product Data.
 2. Submit coordination Drawings for integration of different construction elements. Show sequence and relationships of separate components to avoid any conflict including conflicts in use of space.
 3. Contractor is not entitled to additional payments due to lack of compliance with this Section.

1.08 PRODUCT DATA

- A. Collect Product Data into a single submittal for each element of construction or system. Product Data includes printed information such as manufacturers installation instructions, catalog cuts, standard color charts, roughing-in diagrams and templates, standard wiring diagrams and performance curves. Where Product Data must be specially prepared because standard printed data is not suitable for use, submit as Shop Drawing.
1. Mark each copy to show applicable choices and options. Where printed Product Data includes information on several products, some of which are not required, mark copies to indicate the applicable information. Include the following information:
 - a. Manufacturers printed recommendations

- b. Compliance with recognized trade association standards
 - c. Compliance with recognized testing agency standards
 - d. Application of testing agency labels and seals
 - e. Notation of dimensions verified by field measurement
 - f. Notation of coordination requirements
 - g. Manufacturers local representative and phone number.
2. Do not submit Product Data until compliance with requirements of the Contract Documents has been confirmed.
 3. Preliminary Submittal: Submit a preliminary single-copy of Product Data where selection of options is required.
 4. Submittals: Submit 6 copies of each required submittal. The Project Manager will return two (2) sets to the Contractor marked with action taken and corrections or modifications required.
 - a. Unless noncompliance with Contract Document provisions is observed, the submittal may serve as the final submittal.
 5. Distribution: Furnish copies of final submittal to installers, subcontractors, suppliers, manufacturers, fabricators, and others required for performance of construction activities. Show distribution on transmittal forms.
 - a. Do not proceed with installation until an applicable copy of Product Data applicable is in the Installers possession.
 - b. Do not permit use of unmarked copies of Product Data in connection with construction.

1.09 SAMPLES

- A. Submit full-size, fully fabricated Samples cured and finished as specified and physically identical with the material or product proposed. Samples include partial sections of materials, color range sets, and swatches showing color, texture and pattern.
 1. Mount, display, or package Samples in the manner specified to facilitate review of qualities indicated. Prepare Samples to match the Architects/Owners Sample. Include the following:
 - a. Generic description of the Sample
 - b. Sample source
 - c. Product name or name of manufacturer
 - d. Compliance with recognized standards
 - e. Availability and delivery time

2. Submit Samples for review of kind, color, pattern, and texture, for a final check of these characteristics with other elements, and for a comparison of these characteristics between the final submittal and the actual component as delivered and installed.
 - a. Where variation in color, pattern, texture or other characteristics are inherent in the material or product represented, submit multiple units (not less than 3), that show approximate limits of the variations.
 - b. Refer to other Specification Sections for requirements for Samples that illustrate workmanship, fabrication techniques, details of assembly, connections, operation and similar construction characteristics.
 3. Preliminary submittals: Where Samples are for selection of color, pattern, texture or similar characteristics from a range of standard choices, submit a full set of choices for the material or product.
 - a. Preliminary submittals will be reviewed and returned with the Architects/Owners mark indicating selection and other action.
 4. Submittals: Except for Samples illustrating assembly details, workmanship, fabrication techniques, connections, operation and similar characteristics, submit 3 sets; one will be returned marked with the action taken.
 5. Maintain sets of Samples, as returned, at the Project site, for quality comparisons throughout the course of construction.
 - a. Unless noncompliance with Contract Document provisions is observed, the submittal may serve as the final submittal.
 - b. Sample sets may be used to obtain final acceptance of the construction associated with each set.
- B. Distribution of Samples: Prepare and distribute additional sets to subcontractors, manufacturers, fabricators, suppliers, installers, and others as required for performance of the Work. Show distribution on transmittal forms.
1. Field Samples specified in individual sections are special types of Samples. Field Samples are full-size examples erected on site to illustrate finishes, coatings, or finish materials and to establish the

standard by which the Work will be judged.

1.10 ARCHITECTS / ENGINEERS ACTION

- A. Except for submittals for record, information or similar purposes, where action and return is required or requested, the Architect/Engineer/Project Manager will review each submittal, mark to indicate action taken, and return promptly.
1. Compliance with specified characteristics is the Contractors responsibility.
- B. Action Stamp: The Architect/Engineer/Project Manager will stamp each submittal with a uniform, self-explanatory action stamp. The stamp will be appropriately marked, similarly as follows, to indicate the action taken:
1. Final Unrestricted Release: Where submittals are marked No Exceptions Taken, that part of the Work covered by the submittal may proceed provided it complies with requirements of the Contract Documents; final acceptance will depend upon that compliance.
 2. Final-But-Restricted Release: When submittals are marked Make Corrections Noted that part of the Work covered by the submittal may proceed provided it complies with notations or corrections on the submittal and requirements of the Contract Documents; final acceptance will depend on that compliance.
 3. Returned for Resubmittal: When submittal is marked Revise and Resubmit, do not proceed with that part of the Work covered by the submittal, including purchasing, fabrication, delivery, or other activity. Revise or prepare a new submittal in accordance with the notations; resubmit without delay. Repeat if necessary to obtain a different action mark.
 - a. Do not permit submittals marked Revise and Resubmit to be used at the Project site, or elsewhere where Work is in progress.
 4. Rejected: Submittal does not comply with requirements of the Contract Documents. Submittal must be discarded and entirely new submittal shall be forward to the Project Manager without delay.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION (Not Applicable)

PART 4 - SCHEDULE

4.1 SCHEDULE OF SUBMITTALS DESCRIPTION (SD) AND SUBMITTAL REGISTER

- A. General: The following is a description of each submittal type, specified in other Sections, required for the Project. Include each submittal description (SD) in the Submittal Register included as part of this Section.
1. SD-01: Product Data; submittals which provide calculations, descriptions or other documentation regarding the work.
 2. SD-02: Manufacturer's Catalog Data (Product Data); data composed of information sheets, brochures, circulars, specifications and product data, and printed information in sufficient detail and scope to verify compliance with requirements of the Contract Documents.
 3. SD-03: Manufacturer's Standard Color Charts (Product Data); preprinted illustrations displaying choices of color and finish for a material or product. A type of product data.
 4. SD-04: Shop Drawings; graphic representations which illustrate relationship of various components of the work, schematic diagrams of systems, details of fabrications, layout of particular elements, connections, and other relational aspects of the work.
 5. SD-05: Design Data (Shop Drawings); design calculations, mix designs, analyses, or other data written and pertaining to a part of the work.
 6. SD-06: Instructions (Product Data); preprinted material describing installation of a product, system, or material, including special notices and Material Safety Data Sheets, if any, concerning impedance, hazards, and safety precautions.
 7. SD-07: Schedules (Shop Drawings); a tabular list of data or a tabular listing of locations, features, or other pertinent information regarding products, materials, equipment, or components to be used in the work.
 8. SD-08: Statements (Shop Drawings); a document, required of the Contractor, or through the Contractor by way of a supplier, installer,

manufacturer, or other lower tier contractor, the purpose of which is to further the quality or orderly progression of a portion of the work by documenting procedures, acceptability of methods or personnel, qualifications, or other verification of quality.

9. SD-09: Reports (Product Data); reports of inspection and laboratory tests, including analysis, an interpretation of test results. Each report shall be properly identified. Test methods used and compliance with recognized test standards shall be described.
10. SD-10: Test Reports (Product Data); a report signed by an authorized official of a testing laboratory that a material, product, or system identical to the material, product or system to be provided has been tested in accordance with requirements specified by naming the test method and material. The test report must state the test was performed in accordance with the test requirements; state the test results; and indicate whether the material, product, or system has passed or failed the test. Testing must have been within three years of the date of award of this Contract.
11. SD-11: Factory Test Reports (Shop Drawings); a written report which includes the findings of a test required to be performed by the Contractor or an actual portion of the work or prototype prepared for this project before it is shipped to the job site. The report must be signed by an authorized official of a testing laboratory and must state the test was performed in accordance with the test requirements; state the test results; and indicate whether the material, product, or system has passed or failed the test.
12. SD-12: Field Test Reports (Shop Drawings); a written report which includes the findings of a test made at the job site, in the vicinity of the job site, or on a sample taken from the job site, on a portion of the work, during or after installation. The report must be signed by an authorized official of a testing laboratory or agency and must state the test was performed in accordance with the test requirements; state the test results; and indicate whether the material, product, or system has passed or failed the test.
13. SD-13: Certificates (Shop Drawings); statements signed by responsible officials of a manufacturer of a product, system, or material attesting that the product, system, or material meet specified requirements. The statements must be dated after the award of this contract, name the project, and list the specific requirements which it is intended to address.
14. SD-14: Warranties (Product Data); statements signed by responsible officials of a manufacturer of a product, system, or material attesting that

the product, system, or material will perform its specific function over a specified duration of time. The statement must be dated, and include the name of the project, the Owner's name, and other pertinent data relating to the warranty.

15. SD-15: Samples; samples, including both fabricated and non-fabricated physical examples of materials, products, and units of work as complete units or as portions of units of work.
16. SD-16: Color Selection Samples (Samples); samples of the available choice of colors, textures, and finishes of a product or material, presented over substrates identical in texture to that proposed for the work.
17. SD-17: Sample Panels (Samples); an assembly constructed at the project site in a location acceptable to the Owner's Representative and using materials and methods to be employed in the work; completely finished; maintained during construction; and removed at the conclusion of the work or when authorized by the Owner's Authorized Representative.
18. SD-18: Sample Installations (Samples); a portion of an assembly or material constructed where directed and, if approved, retained as a part of the work.
19. SD-19: Records; documentation to ensure compliance with an administrative requirement or to establish an administrative mechanism.
20. SD-20: Operation and Maintenance Manuals (Records); data intended to be incorporated in an Operations and Maintenance Manual
21. SD-21: Test Reports of Existing Conditions; a document describing existing conditions and operations of systems and components prior to the start of any work. Testing shall be held in the presence of the Owner's Authorized Representative. Provide copies of the test reports to the Owner's Authorized Representative.
22. SD-22: Demonstrations; physical operation of equipment and systems by factory authorized representatives to demonstrate to the Owner's facility personnel proper operation of systems. Provide all required documentation that certified completed demonstration.
23. SD-23: Record Drawings; delineated documentation accurately depicting final installation location of components and systems of the building.

24. SD-24: Shop Drawings in Magnetic Medium; when drawings are required. All materials shall be provided in AUTOCAD Release 2000 or 2002.
- B. Submittal Register: The Contractor is to maintain an accurate updated submittal register and will bring this register to each scheduled progress meeting with the Owner and the Designer. This register should include the following items:
1. Submittal-Description and Number assigned.
 2. Date to Designer.
 3. Date returned to Contractor (from Designer).
 4. Status of Submittal (Accepted/Resubmit/Rejected).
 5. Date of Resubmittal and Return (as applicable).
 6. Date material released (for fabrication).
 7. Projected date of fabrication.
 8. Projected date of delivery to site.
 9. Status of submittal.

SUBMITTAL REGISTER (PART A)

Contract Number: Project

Title:

Spec. Section Number	Submittal Description (SD) Number	Spec. Paragraph Number	Designer Reviewer	Trans Control Number	Planned Submittal Date
(A)	(B)	(C)	(D)	(E)	(F)
02200	SD-12	1.4 A			
02270	SD-02, SD-15	1.3			
02281	SD-01	1.04			
02480	SD-12, SD-07, SD-13				
02513	SD-13	1.3 A			
02520	SD-01, SD-13	1.4A			
02577	SD-01, SD-02	1.3			
02666	SD-01, SD-23, SD-20	1.4A,B,C,D			
02668	SD-01, SD-04, SD-04, SD-23	1.4			
02720	SD-01, SD-20, SD-23	1.4A,B,C,D			
02730	SD-01, SD-20, SD-23	1.4A,B,C,D			
02831	SD-01	1.4A			
03300	SD-05	1.4			
16010	SD-23	1.16			
16010	SD-14	1.18			
16090	SD-12	3.1			
16095	SD-22	1.1			
16098	SD-20	1.2			
16111	SD-02	1.4			
16123	SD-02	1.3			
16131	SD-02	1.3			
16133	SD-01, SD-02	1.3			
16133	SD-23	1.4			
16141	SD-02, SD-06	1.3			
16160	SD-01, SD-02, SD-06	1.3			
16170	SD-23	1.3			
16170	SD-12	3.14			
16180	SD-02	1.4			
16421	SD-04	1.5			
16441	SD-02	1.4			
16471	SD-01, SD-02, SD-04	1.3			
16472	SD-01, SD-02, SD-04	1.3			

16510	SD-02	1.4			
16530	SD-02	1.4			
16671	SD-01, 2, 4 & 6	1.4			
Spec. Section Number	Submittal Description (SD) Number	Spec. Paragraph Number	Designer Reviewer	Trans Control Number	Planned Submitta I Date
(A)	(B)	(C)	(D)	(E)	(F)
16671	SD-12	3.4			
16691	SD-01, SD-02	1.3			
16691	SD-14	1.8			
16723	SD-01, 2, 4, 6	1.7			
16723	SD-23	1.8			
16723	SD-20	1.9			
16723	SD-14	1.10			
16723	SD-22	1.13			
16723	SD-12	3.14			
16723	SD-13	3.15			

SECTION 01500 - TEMPORARY FACILITIES

PART 1 GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section specifies requirements for temporary services and facilities, including utilities, construction and support facilities, security and protection.
- B. Temporary utilities required include but are not limited to:
 - 1. Water service and distribution
 - 2. Temporary electric power and lights
 - 3. Telephone service & DSL Service
 - 4. Sanitary facilities
- C. Temporary construction and support facilities required include but are not limited to:
 - 1. Temporary heat and ventilation as required to facilitate construction process and personnel.
 - 2. Field office and storage sheds.
 - 3. Sanitary facilities, including drinking water.
 - 4. Temporary enclosures.
 - 5. Hoists and temporary elevator use.
 - 6. Temporary Project identification signs and bulletin boards
 - 7. Waste disposal services.
 - 8. Rodent and pest control.
 - 9. Pumps to control water table during construction activities.
 - 9. Construction aids and miscellaneous services and facilities.
- D. Security and protection facilities required include but are not limited to:
 - 1. Temporary fire protections
 - 2. Barricades, warning signs, lights
 - 3. Sidewalk bridge or enclosure fence for the site.
 - 4. Environmental protection
 - 5. Fencing, gates

6. Barriers

- a. Contractor shall be responsible for providing a temporary 6' high chain link construction fence around the entire perimeter of the construction site. Fence shall be removed upon completion of the job. Limits of construction fence indicate on the site plan drawings or if not indicated as required to maintain site security and safety.
- b. Contractor shall be responsible for providing security measures as required to prevent public entry to construction areas and adjacent properties from damage from construction operations.
- c. Contractor shall be responsible for providing a protective barrier around trees and plants designated to remain as indicated in plans and as required in zoning ordinances. Provide and maintain silt fences. Protect against vehicular traffic, stored materials, dumping, chemically injurious materials and puddling or continuous running water.

7. Enclosures

- a. Provide temporary weather-tight closures of openings in exterior surfaces to provide acceptable working conditions and protection for materials, to allow for temporary heating, and to prevent entry of unauthorized persons. Provide temporary doors with self-closing hardware and locks.

8. Protection of Installed Work

- a. Provide temporary protection for installed products. Control work and traffic in immediate area to avoid damage.
- b. Provide protective coverings at walls, projections, jambs, sills and soffits of openings. Provide barriers or coverings to protect roof and finished floors and stairs from work and traffic, movement of heavy objects and storage.
- c. Prohibit work, traffic and storage on waterproofed and roofed surfaces, and on lawn and landscaped areas

that is not a part of the work for those surfaces and areas.

9. Security and Maintenance

- a. Vehicular and pedestrian gates shall be securely locked at all times when no work is in progress and when not required for construction activities. During all work hours, gates which must be open shall be continuously monitored by the Contractor to prevent unauthorized personnel or vehicles from entering the construction site.
- b. Fencing shall be as specified in 1.02 D above and shall prevent pedestrian travel through the site for any reason.
- c. Temporary fencing shall be removed only for construction reasons. If temporary fencing removal is required for non-construction reasons, fencing shall be immediately replaced and secured as soon as the activity for which its removal was required is completed, or if the activity cannot be completed by the end of the work day, temporary security measures shall be taken by the Contractor to ensure that there is no breach of security even during off-work periods.
- d. No Trespassing and similar signs shall be posted at gates and along fencing adjacent to public areas to inform non-construction personnel of the reason for the fence and potential hazards of entering the construction site. Said signs shall be of a size and spacing to be legible from any point along the entire perimeter of the construction site.

1.03 SUBMITTALS

- A. Temporary Utilities: Submit reports of tests, inspections, meter readings and similar procedures performed on temporary utilities.

1.04 QUALITY ASSURANCE

- A. Regulations: Comply with industry standards and applicable laws and regulations if authorities having jurisdiction, including but not limited to:

1. Building Code requirements
 2. Health and safety regulations
 3. Utility company regulations
 4. Police, Fire Department and Rescue Squad rules
 5. Environmental Protection regulations
- B. Standards: Comply with NFPA Code 241, ABuilding Construction and Demolition Operations, ANSI-A10 Series standards for Safety Requirements for Construction and Demolition, and NECA Electrical Design Library Temporary Electrical Facilities.
1. Refer to Guidelines for Bid Conditions for Temporary Job Utilities and Services, prepared jointly by AGC and ASC, for industry recommendations.
 2. Electrical Services: Comply with NEMA, NECA and UL standards and regulations for temporary electric service. Install service in compliance with National Electric Code (NFPA 70).
- C. Inspections: Arrange for authorities having jurisdiction to inspect and test each temporary utility before use. Obtain required certifications and permits.

1.05 PROJECT CONDITIONS

- A. Temporary Utilities: Prepare a schedule indicating dates for implementation and termination of each temporary utility. At the earliest feasible time, when acceptable to the Owner, change over from use of temporary service to use for the permanent service.
- B. Conditions of Use: Keep temporary services and facilities clean and neat in appearance. Operate in a safe and efficient manner. Take necessary fire prevention measures. Do not overload facilities, or permit them to interfere with progress. Do not allow hazardous dangerous or unsanitary conditions, or public nuisances to develop or persist on the site.
- C. Water Control: Grade site to drain. Maintain excavations free of water. Provide and operate pumping equipment if necessary. Provide silt barriers required by the Florida Department of Transportation, St. Johns and any other authority having jurisdiction over the Project.
- D. Cleaning During Construction: Control accumulation of waste materials and rubbish so as to maintain a neat, clean and orderly

and safe project periodically dispose of off-site as needed.

Clean interior areas prior to start of finish work, maintain areas free of dust and other contaminants during finishing operations.

- E. Project Identification: Provide a sign size 4'-0" x 8'-0", shall have 1) County seal, 2) Name of project, 3) Name of County Chairman, 4) Name of County Commissioners, 5) Consultant Team, 6) General Contractor. Locate to provide an unobstructed view from adjoining roadway. Remove project sign upon final completion acceptance.
- G. Protection of Adjacent Properties: Locate on site construction operations that will generate noise and/or dust as far as practical from occupied structures on adjacent properties so as to minimize disturbances to the occupants of these structures or properties.

Prevent dust or other contaminants caused by construction operations for this Project from being carried to adjacent properties by installation of protective barriers and/or suspension of construction operations during high winds.

Dispose of all construction debris which may be carried to adjacent properties by winds. Remove debris daily and/or more often as required to prevent contamination of adjacent properties.

- H. Removal: Remove temporary materials, equipment and construction facilities prior to Substantial Completion inspection.

Remove temporary utility services prior to Final Completion Inspection.

Clean and repair damage caused by installation or use of temporary facilities. Remove underground installations; grade and complete all work on site as indicated.

- I. Conversion to Public Utilities: General Contractor is to coordinate and arrange with the appropriate utility service providing agencies and make arrangements for the installation and connection to final utilities prior to Final Completion inspection.

General Contractor shall provide any and all coordination, scheduling and layouts as may be required by the service utilities.

PART 2 PRODUCTS

2.01 MATERIALS

- A. General: Provide new materials; if acceptable to the Project Manager, undamaged previously used materials in serviceable condition may be used. Provide materials suitable for the use intended.
- B. Lumber and Plywood: Comply with requirements in Division 6 Section Rough Carpentry.
- D. Tarpaulins: Provide waterproof, fire-resistant, UL labeled tarpaulins with flame-spread rating of 15 or less. For temporary enclosure provide translucent nylon reinforced laminated polyethylene or polyvinyl chloride fire retardant tarpaulins.
- E. Water: Provide portable water approved by local health authorities.
- F. Open-Mesh Fencing: Provide 11-gage, galvanized 2-inch, chain link fabric fencing 6-feet high with galvanized barbed wire top strand and galvanized steel pipe posts, 1 2" I.D. for line posts and 2 2 I.D. for corner posts.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Use qualified personnel for installation of temporary facilities. Locate facilities where they will serve the Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required.
- B. Provide each facility ready for use when needed to avoid delay. Maintain and modify as required. Do not remove until facilities are no longer needed, or are replaced by authorized use of completed permanent facilities.

3.02 SECURITY AND PROTECTIONS FACILITIES INSTALLATION

- A. Except for use of permanent fire protection as soon as available do not change over from use of temporary security and protection facilities to permanent facilities until Substantial Completion, or longer as requested by the Project Manager.
- B. Temporary Fire Protection: Until fire protection needs are supplied by permanent facilities of the types needed to protect against

reasonably predictable and controllable fire losses. Comply with NFPA 10 Standard for Portable Fire Extinguishers, and NFPA 241 Standard for Safeguarding Construction, Alterations and Demolition Operations.

1. Locate fire extinguishers where convenient and effective for their intended purpose, but not less than one extinguisher on each floor at or near each usable stairwell.
 2. Store combustible materials in containers in fire-safe locations.
 3. Maintain unobstructed access in fire extinguishers, fire hydrants, temporary fire protection facilities, stairways and other access routes for fighting fires. Prohibit smoking in hazardous fire exposure areas.
 4. Provide supervision of welding operations, combustion type temporary heating units, and similar sources of fire ignition.
- C. Permanent Fire Protection: At the earliest feasible date in each area of the Project, complete installation of the permanent fire protection facility, including connected services, and place into operation and use. Instruct key personnel on use of facilities.
- D. Barricades, Warning Signs and Lights: Comply with standards and code requirements for erection of structurally adequate barricades. Paint with appropriate colors, graphics and warning signs to inform personnel and the public of the hazard being protected against. Where appropriate and needed, provide lighting, including flashing red or amber lights.
- E. Enclosure Fence: When excavation begins, install an enclosure fence with lockable entrance gates. Locate where indicated, or enclose the entire site or the portion determined sufficient to accommodate construction operations. Install in a manner that will prevent people, dogs and other animals from easily entering the site, except by the entrance gates.
1. Provide open-mesh, chain-link fencing with posts set in a compacted mixture of gravel and earth.
- F. Security Enclosure and Lockup: Install substantial temporary enclosure of partially completed areas of construction. Provide locking entrances to prevent unauthorized entrance, vandalism, theft and similar violations of security.

1. Storage: Where materials and equipment must be stored, and are of value or attractive for theft, provide a secure lockup. Enforce discipline in connection with the installation and release of materials to minimize the opportunity for theft and vandalism.
- G. Environmental Protection: Provide protection, operate temporary facilities and conduct construction in ways and by methods that comply with environmental regulations, and minimize the possibility that air, waterways and subsoil might be contaminated or polluted, or that other undesirable effects might result. Avoid use of tools and equipment which produce harmful noise. Restrict use of noise making tools and equipment to hours that will minimize complaints from persons or firms near the site.

3.03 OPERATION, TERMINATION AND REMOVAL

- A. Supervision: Enforce strict discipline in use of temporary facilities. Limit availability of temporary facilities to essential and intended uses to minimize waste and abuse.
- B. Maintenance: Maintain facilities in good operating condition until removal. Protect from damage by freezing temperatures and similar elements.
1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation and similar facilities on a 24 hour day basis where required to achieve indicated results and to avoid possibility of damage.
 2. Protection: Prevent water filled piping from freezing. Maintain makers for underground lines. Protect from damage during excavation operations.
- C. Termination and Removal: Unless the Architect requests that it be maintained longer, remove each temporary facility when the need has ended, or when replaced by authorized use of a permanent facility, or no later than substantial completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with the temporary facility. Repair damaged Work, clean exposed surfaces and replace construction that cannot be satisfactorily repaired.

END OF SECTION 01500

SECTION 01600 - MATERIALS AND EQUIPMENT**PART 1 GENERAL****1.01 RELATED DOCUMENTS**

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section specifies administrative and procedural requirements governing the Contractors selection of products for use in the Project.
 - 1. Multiple Prime Contracts: Provisions of this Section apply to the construction activities of each prime Contractor.
- B. The Contractors Construction Schedule and the Schedule of Submittals are included under Section 01300 Submittals.
- C. Standards: Refer to Section Definitions and Standards for applicability of industry standards to products specified.
- D. Administrative procedures for handling requests for substitutions made after award of the Contract are included under Section 01631 Product Substitution.

1.03 DEFINITIONS

- A. Definitions used in this Article are not intended to change the meaning of other terms used in the Contract Documents such as specialties, systems, structure, finishes, accessories, and similar terms. Such terms are self-explanatory and have well recognized meanings in the construction industry.
 - 1. Products are items purchased for incorporation in the Work, whether purchased for the Project or taken from previously purchased stock. The term product includes the term material, equipment, system and terms of similar intent.
 - a. Named Products are items identified by manufacturers' product name, including make or model designation, indicated in the manufacturers published product literature

that is current as of the date of the Contract Documents.

- b. Foreign Products, as distinguished from domestic products, are items substantially manufactured (50 percent or more of value) outside of the United States and its possessions; or produced or supplied by entities substantially owned (more than 50 percent) by persons who are not citizens or nor living within the United States and its possessions.
2. Materials are products that are substantially shaped; cut, worked, mixed, finished, refined or otherwise fabricated, processed, or installed to form a part of the Work.
 3. Equipment is a product with operational parts, whether motorized or manually operated, that requires service connections such as wiring or piping.

1.04 SUBMITTALS

- A. Product List Schedule: Prepare a schedule showing products specified in a tabular form acceptable to the Project Manager. Include generic names of products required. Include the manufacturers name and proprietary product names for each item listed.
 1. Coordinate the product list schedule with the Contractors Construction Schedule and the Schedule of Submittals.
 - a. Related Specification Section Number
 - b. Generic name used in Contract Documents
 - c. Proprietary name, model number and similar designations.
 - d. Manufacturers name and address
 - e. Suppliers name and address
 - f. Installers name and address
 - g. Projected delivery date, or time span of delivery period.
 2. Initial Submittal: Within 30 days after date of commencement of the Work, submit 3 copies of an initial product list schedule. Provide a written explanation for omissions of data, and for known variations from Contract requirements.
 - a. At the Contractors option, the initial submittal may be limited to product selections and designations that must be established early in the Contract period.
 3. Complete Scheduled: Within 45 days after date of commencement of the Work, submit 3 copies of the completed product list schedule.

Provide a written explanation for omissions of data, and for known variations from Contract requirements.

4. Architects Action: The Architect will respond in writing to the Contractor within 2 weeks of receipt of the completed product list schedule. No response within this time period constitutes no objection to listed manufacturers or products, but does not constitute a waiver of the requirement that products comply with Contract Documents. The Architects response will include the following:
 - a. A list of unacceptable product selections, containing a brief explanation of reasons for this action.

1.05 QUALITY ASSURANCE

- A. Source Limitations: To the fullest extent possible, provide products of the same kind, from a single source.
- B. Compatibility of Options: When the Contractor is given the option of selecting between two or more products for use on the Project; the product selected shall be compatible with products previously selected, even if previously selected products were also options.
- C. Nameplates: Except for required labels and operating data, do not attach or imprint manufacturers or producers nameplates or trademarks on exposed surfaces of products which will be exposed to view in occupied spaces or on the exterior.
 1. Labels: Locate required product labels and stamps on a concealed surface or, where required for observation after installation, on an accessible surface that is not conspicuous.
 2. Equipment Nameplates: Provide a permanent nameplate on each item of service-connected or power-operated equipment. Locate on an easily accessible surface which is inconspicuous in occupied spaces. The nameplate shall contain the following information and other essential operating data.
 - a. Name of product and manufacturer
 - b. Model and serial number
 - c. Capacity
 - d. Speed
 - e. Ratings
 - f. Additional pertinent information

1.06 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Deliver, store and handle products in accordance with the manufacturers' recommendations, using means and methods that will prevent damage, deteriorating and loss, including theft.
1. Schedule delivery to minimize long-term storage at the site and to prevent overcrowding of construction spaces.
 2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft and other losses.
 3. Deliver products to the site in the manufacturers original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting and installing.
 4. Inspect products upon delivery to ensure compliance with the Contract Documents and to ensure that products are undamaged and properly protected.
 5. Store products at the site in a manner that will facilitate inspection and measurement of quantity or counting of units.
 6. Store heavy materials away from the Project structure in a manner that will not endanger the supporting construction.
 7. Store products subject to damage by the elements above ground, under cover in a weather tight enclosure, with ventilation adequate in prevent condensation. Maintain temperature and humidity within range required by manufacturers instructions.

PART 2 PRODUCTS

2.01 PRODUCT SELECTION

- A. General Product Requirements: Provide products that comply with the Contract Documents, that are undamaged and, unless otherwise indicated, unused at the time of installation.
1. Provide products complete with all accessories, trim, finish, safety guards and other devices and details needed for a complete installation and for the intended use and effect.

2. Standard Products: Where available, provide standard products of types that have been produced and used successfully in similar situation on other projects.
- B. Product Selection Procedures: Product selection is governed by the Contract Documents and governing regulations, not by previous Project experience. Procedures governing product selection include the following:
1. Proprietary Specification Requirements: Where only a single product or manufacturer is named, provide the product indicated. No substitutions will be permitted.
 - a. Where products or manufacturers are specified by name, accompanied by the term or equal or approved equal comply with the Contractor Document provisions concerning substitutions to obtain approval for use of an unnamed product.
 2. Non-Proprietary Specifications: When the Specifications list products or manufacturers that are available and may be incorporated in the Work, but do not restrict the Contractor to use of those products only, the Contractor may propose any available product that complies with Contract requirements. Comply with Contract Document provisions concerning substitutions to obtain approval for use of an unnamed product.
 3. Descriptive Specification Requirements: Where Specifications describe a product or assembly, listing exact characteristics required, with or without use of a brand or trade name, provide a product or assembly that provides the characteristics and otherwise complies with Contract requirements.
 4. Performance Specification Requirements: Where Specifications require compliance with performance requirements, provide products that comply with these requirements, and are recommended by the manufacturer for the application indicated.
 - a. Manufacturers recommendations may be contained in published product literature, or by the manufacturers' certification of performance.
 5. Compliance with Standards, Codes and Regulations: Where the Specifications only requires compliance with an imposed code, standard or regulation, select a product that complies with the

standards, codes or regulations specified.

6. Visual Matching: Where Specifications require matching an established Sample, the Architects decision will be final on whether a proposed product matches satisfactorily.
 - a. Where no product available within the specified category matches satisfactorily and also complies with other specified requirements, comply with provisions of the Contract Documents concerning substitutions for selection of a matching product in another product category, or for noncompliance with specified requirements.
7. Visual Selection: Where specified product requirements include the phrase ... as selected from manufacturers standard colors, pattern, textures... or a similar phrase, select a product and manufacturer that complies with other specified requirements. The Architect will select the color, pattern and texture from the product line selected.
8. Asbestos free materials: No products containing asbestos shall be used for any part of the work for this product. Provide verification.

END OF SECTION 01600

SECTION 01631-PRODUCTS SUBSTITUTIONS

PART 1 GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section specifies administrative and procedural requirements for handling requests for substitutions made after award of the Contract.
- B. The Contractors Construction Schedule and the Schedule of Submittals are included under Section Submittals.
- C. Standards: Refer to Section Definitions and Standards for applicability of industry standards to products specified.
- D. Procedural requirements governing the Contractors selection of products and product options are included under Section Materials and Equipment.

1.03 DEFINITIONS

- A. Definitions used in this Article are not intended to change or modify the meaning of other terms used in the Contract Documents.

1.04 SUBMITTALS

- A. Substitution Request Submittal: Request for substitution will be considered if received within forty-five (45) days after commencement of the Work. As long as this time allowance will not impact the construction schedule.
 - 1. Submit three (3) copies of each request for substitution for consideration. Submit requests in the form and in accordance with procedures required for Change Order proposals.
 - 2. Identify the product, or the fabrication or installation method to be replaced in each request. Include related Specification

Section and Drawing numbers. Provide complete documentation showing compliance with the requirements for substitution, and the following information, as appropriate:

- a. Product Data, including Drawings, and descriptions of products, fabrication and installation procedures.
 - b. Samples, where applicable or requested.
 - c. A detailed comparison of significant qualities of the proposed substitution with those of the Work specified. Significant qualities may include elements such as size, weight, durability, performance and visual effect.
 - d. Coordination information, including a list of changes or modifications needed to other parts of the Work and to construction performed by the Owner and separate Contractors, that will become necessary to accommodate the proposed substitution.
 - e. A statement indicating the substitutions effect on the Contractors Construction Schedule compared to the schedule without approval of the substitution. Indicate the effect of the proposed substitution on overall Contract Time.
 - f. Cost information, including a proposal of the net change, if any in the Contract Sum.
 - g. Certification by the Contractor that the substitution proposed is equal-to or better in every significant respect to that required by the Contract Documents, and that it will perform adequately in the application indicated. Include the Contractors waiver of rights to additional payment or time, that may subsequently become necessary because of the failure of the substitution to perform adequately.
3. Architects Action: Within two weeks of receipt of the request for substitution, the Architect will request additional information or documentation necessary for evaluation of the request if needed. Within two (2) weeks of receipt of the request, or one week of receipt of the additional information or documentation, which ever is later, the Architect will notify the Contractor of acceptance or rejection of the proposed substitution. If a decision on use of a proposed substitute cannot be made or obtained within the time allocated, use the project specified by name. Decision on the use of a product substitution or its rejection by the Architect is

considered final. Acceptance will be in the form of a Change Order.

PART 2 PRODUCTS

2.01 SUBSTITUTIONS

- A. Conditions: The Contractors substitution request will be received and considered by the Architect when one or more of the following conditions are satisfied, as determined by the Architect; otherwise requests will be returned without action except to record noncompliance with these requirements.
1. Extensive revisions to Contract Documents are not required.
 2. Proposed changes are in keeping with the general intent of Contract Documents.
 3. The request is timely, fully documented and properly submitted.
 4. The specified product or method of construction cannot be provided within the Contract Time. The request will not be considered if the product or method cannot be provided as a result of failure to pursue the Work promptly or coordinate activities properly.
 5. The specified product or method of construction cannot receive necessary approval by a governing authority, and the requested substitution can be approved.
 6. A substantial advantage is offered the Owner, in terms of cost, time, energy conservation or other considerations of merit, after deducting offsetting responsibilities the Owner may be required to bear. Additional responsibilities for the Owner may include additional compensation to the Architect for redesign and evaluation services, increased cost of other construction by the Owner or separate Contractors, and similar consideration.
 7. The specified product or method of construction cannot be provided in a manner that is compatible with other materials, and where the Contractor certifies that the substitution will overcome the incompatibility.
 8. The specified product or method of construction cannot be

coordinated with other materials, and where the Contractor certifies that the proposed substitution can be coordinated.

9. The specified product or method of construction cannot provide a warranty required by the Contract Documents and where the Contractor certifies that the proposed substitution provide the required warranty.
- B. The Contractors submittal and Project Managers acceptance of Shop Drawings, Product Data or Samples that relate to construction activities not complying with the Contract Documents does not constitute an acceptable or valid request for substitution, nor does it constitute approval.
- C. Substitution request constitutes a representation that Contractor:
1. Has investigated proposed product and determined that it meets or exceeds, in all respects, specified product.
 2. Will provide the same warranty for substitution as for specified product.
 3. Will coordinate installation and make other changes which may be required for work to be complete in all respects.
 4. Waives claims for additional costs which may subsequently become apparent. All costs associated with the substitution will be paid by the Contractor regardless of approvals given, and regardless of subsequent difficulties experienced as a result of substitutions.

END OF SECTION 01631

SECTION 01700 - PROJECT CLOSE-OUT

PART 1 GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section specifies administrative and procedural requirements for project close-out, including but not limited to:
 - 1. Inspection procedures
 - 2. Project record document submittal. (Substantial Completion)
 - 3. Operating and maintenance manual submittal (Substantial Completion Requirements).
 - 4. Submittal of warranties (Substantial Completion Requirement).
 - 5. Final cleaning
- B. Close-out requirements for specific construction activities are included in the appropriate Sections in Divisions 2 through 16.
- C. Final payment to be made when the County has received all required close-out documents.

1.03 SUBSTANTIAL COMPLETION

- A. Preliminary Procedures: Before requesting inspection for certification of Substantial Completion, complete the following: List exceptions in the request.
 - 1. In the Application for Payment that coincides with, or first follows, the date Substantial Completion is claimed, show 100 percent completion for the portion of the Work claimed as substantially complete. Include supporting documentation for completion as indicated in these Contract Documents and a statement showing an accounting of changes to the Contract Sum.
 - a. If 100 percent completion cannot be shown, include a list of incomplete items, the value of incomplete construction, and reasons the Work is not complete.

2. Advise Owner of pending insurance change-over requirements.
 3. Submit specific warranties, workmanship bonds, maintenance agreements, final certifications and similar documents.
 4. Obtain and submit releases enabling the Owner unrestricted use of the Work and access to services and utilities; include occupancy permits, operating certificates and similar releases.
 5. Complete final clean up requirements, including touch-up painting. Touch-up and otherwise repair and restore marred exposed finishes.
- B. Inspection Procedures: On receipt of a request for inspection, the Project Manager will either proceed with inspection or advise the Contractor of unfilled requirements. The Project Manager will prepare the Certificate of Substantial Completion following inspection, or advise the Contractor of construction that must be completed or corrected before the certificate will be issued.
1. Results of the completed inspection will form the basis of requirements for final acceptance.
 2. Should the project fail to meet the standards required for Substantial Completion as defined in the documents the Contractor will pay the expense of a second inspection by the Project Manager/Consultants and the Owner. Cost will be deducted from the Contractors retainage.

1.04 FINAL ACCEPTANCE

- A. Preliminary Procedures: Before requesting final inspection for certification of final acceptance and final payment, complete the following List exceptions in the request:
1. Submit the final payment request with releases and supporting documentation not previously submitted and accepted. Include certificates of insurance for products and completed operations where required.
 2. Submit and updated final statement, accounting for final additional changes to the Contract Sum.

3. Submit a certified copy of the Project Managers final inspection list of item to be completed or corrected, stating that each item has been completed or otherwise resolved for acceptance, and the list has been endorsed and dated by the Project Manager.
 4. Submit final meter readings for utilities, a measured record of stored fuel and similar data as of the date of Substantial Completion, or when the Owner took possession of the responsibility for corresponding elements of the Work.
 5. Submit consent of surety to final payment.
 6. Submit a final liquidated damages settlement statement
 7. Submit evidence of final, continuing insurance coverage complying with insurance requirements.
- B. Reinspection Procedure: The Project Manager will reinspect the Work upon receipt of notice that the Work, including inspection list items from earlier inspections, has been completed, except items whose completion has been delayed because of circumstances acceptable to the Project Manager.
1. Upon completion of reinspection, the Project Manager will prepare a certification of final acceptance, or advise the Contractor of Work that is incomplete or of obligations that have not been fulfilled but are required for final acceptance.

1.05 RECORD DOCUMENT SUBMITTALS

- A. General: Do not use record documents for construction purposes; protect from deterioration and loss in a secure, fire-resistive location; provide access to record documents for the Project Managers reference during normal working hours.
- B. Record Drawings: Maintain a clean, undamaged set of blue or black line white-prints of Contractor Drawings and Shop Drawings. Mark the set to show the actual installation where the installation varies substantially from the Work as originally shown. Mark whichever drawing is most capable of showing conditions fully and accurately; where Shop Drawings are used, record a cross-reference at the corresponding location on the Contract Drawings. Give particular attention to concealed elements that would be difficult to measure and record at a later date.

Provide for project photographs if deemed necessary by Owners representative.

1. Mark record sets with red erasable pencil; use other colors to distinguish between variations in separate categories of the Work.
 2. Mark new information that is important to the Owner, but was not shown on Contract Drawings or Shop Drawings.
 3. Note related Change Order numbers where applicable.
 4. Organize record drawing sheets, and print suitable titles, dates and other identification on the cover of each set.
 5. Provide three (3) additional sets of black line drawing sets of As-Builts Drawings.
- C. Record Specifications: Maintain one complete copy of the Project Manual, including addenda, and one copy of other written construction documents such as Change Orders and modifications issued in printed form during construction. Mark these documents to show substantial variations in actual Work performed in comparison with the text of the Specifications and modifications. Give particular attention to substitutions, selection of options and similar information on elements that are concealed or cannot otherwise be readily discerned later by direct observation. Note related record drawing information and Project Data.
1. Upon completion of the Work, submit record Specifications to the Project Manager for the Owners records.
- D. Record Project Data: Maintain one copy of each Product Data submittal. Mark these documents to show significant variation in actual Work performed in comparison with information submitted. Include variations in products delivered to the site, and from the manufacturers installation instructions and recommendations. Give particular attention to concealed products and portions of the Work which cannot otherwise be readily discerned later by direct observation. Note related Change Orders and mark-up of record drawings and Specifications.
1. Upon completion of mark-up, submit complete set of record Product Data in the three ring binder (indexed) to the Project Manager for the Owners records.

- E. Record Sample Submitted: Immediately prior to the date or dates of Substantial Completion, the Contractor will meet at the site with the Project Manager and the Owners personnel to determine which of the submitted Samples that have been maintained during progress of the Work are to be transmitted to the Owner for record purposes. Comply with delivery to the Owners Sample storage area.
- F. Miscellaneous Record Submittals: Refer to other Specification Sections for requirements of miscellaneous record-keeping and submittals in connection with actual performance of the Work. Immediately prior to the date or dates of Substantial Completion, complete miscellaneous record and place in good order, properly identified and bound or filed, ready for continued use and reference. Submit to the Project Manager for the Owners records.
- G. Maintenance Manuals: Organize operating and maintenance data into five (5) suitable sets of manageable size. Bind properly indexed data in individual heavy-duty 2-inc, 3-ring vinyl covered binders, with pocket folders for folded sheet information. Mark appropriate identification on front and spine of each binder. Include the following types of information:
 - 1. Emergency instructions
 - 2. Spare parts list
 - 3. Copies of warranties
 - 4. Wiring diagrams
 - 5. Recommended turn around cycles
 - 6. Inspection procedures
 - 7. Shop Drawings and Product Data
 - 8. Fixture lamping schedule

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION

3.01 CLOSE-OUT PROCEDURES

- A. Operating and Maintenance Instructions: Arrange for each installer of equipment that requires regular maintenance. If installers are not experienced in procedures, provide instruction by manufacturers representatives. All items to be provided or completed prior to certificate of Substantial Completion being issued by the Owner. Include a detailed review of the following items:
 - 1. Maintenance manuals

2. Record documents
 3. Spare parts and materials
 4. Tools
 5. Lubricants
 6. Fuels
 7. Identification systems
 8. Control sequences
 9. Hazards
 10. Cleaning
 11. Warranties and bonds
 12. Maintenance agreements and similar continuing commitments
 13. On site instructions to County maintenance personnel on major systems operations such as HVAC as per technical specifications.
 14. Contractor shall provide certified as-builts (by licensed surveyor) of project, and turn these over to the Owner as part of Project Closeout.
- B. As part of instruction for operating equipment, demonstrate the following procedures, prior to the Owner issuing Certificate of Substantial Completion:
1. Start-up
 2. Shutdown
 3. Emergency operations
 4. Noise and vibration adjustments
 5. Safety procedures
 6. Economy and efficiency adjustments

3.02 PROJECT CLOSE-OUT MANUALS AT SUBSTANTIAL COMPLETION

- A. Submit Project Close-out Manuals prior to issuance of final application for payment. Provide three (3) copies.
- B. Bind in commercial quality 8 ½" x 11" three ring binder, indexed with hardback, cleanable, plastic covers.
- C. Label cover of each binder with typed title PROJECT CLOSE-OUT MANUAL, with title of project; name, address, and telephone number of Contractor and name of responsible Principal.
- D. Provide table of contents: Neatly typed, in the following sequence:

1. Final Certificate of Occupancy
 2. Warranty Service Subcontractors Identification List
 3. Final Lien Waivers and Releases
 4. Warranties and Guarantees
 5. Systems Operations and Maintenance Instruction
 6. Manufacturers Certificates and Certifications
 7. Maintenance Service Contracts
 8. Spare Parts Inventory List
 9. Special Systems Operating Permits or Approvals
 10. Asbestos free materials notarized statement
- E. Provide all documents for each section listed. List individual documents in each section in the table of contents, in the sequence of the Table of Contents of the Project Manual.
- F. Identify each document listed in the Table of Contents with the number and title of the specification section in which specified, and the name of the Product or Work item.
- G. Separate each section with index to sheets that are keyed to the Table of Contents listing.
- H. Warranty Service Subcontractors List shall identify subcontractor supplier, and manufacturer for each warranty with name, address and emergency telephone number.
- I. Contractor shall complete the attached form "Contractor Installed Equipment Input Form". This form is included as Attachment 'A' to Specification Section 01700.

3.03 FINAL CLEANING

- A. General: General cleaning during construction is required by the General Conditions and included in Section Temporary Facilities.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to the condition expected in a normal, commercial building cleaning and maintenance program. Comply with manufacturers instructions.
1. Complete the following cleaning operations before requesting inspection for Certification of Substantial Completion.
 - a. Remove labels that are not permanent labels.

- b. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compound and other substances that are noticeable vision-obscuring materials. Replace chipped or broken glass and other damaged transparent materials.
 - c. Clean exposed exterior and interior hard-surfaced finished to a dust-free condition, free of stains, films and similar foreign substances. Restore reflective surfaces to their original reflective condition. Leave concrete floors broom clean. Vacuum carpeted surfaces
 - d. Wipe surfaces of mechanical and electrical equipment. Remove excess lubrication and other substances. Clean plumbing fixtures to a sanitary condition. Clean light fixtures and lamps.
 - e. Clean the site, including landscape development areas, of rubbish, litter and other foreign substances. Sweep paved areas broom clean; remove stains, spills and other foreign deposits. Rake grounds that are neither paved nor planted, to a smooth even-textured surface. Remove waste and surplus materials from the site in an appropriate manner.
- C. Pest Control: Engage an experienced exterminator to make a final inspection, and rid the Project of rodents, insects and other pests.
- D. Removal of Protection: Remove temporary protection and facilities installed for protection of the Work during construction.
- E. Compliance: Comply with regulations of authorities having jurisdiction and safety standards for cleaning. Do not burn waste materials. Do not bury debris or excess materials on the Owners property. Do not discharge volatile, harmful or dangerous materials into drainage systems. Remove waste materials from the site and dispose of in a lawful manner.
- 1. Where extra materials of value remaining after completion of associated Work have become the Owners property, arrange for disposition of these materials as direct.

END OF SECTION 01700

SECTION 01740 - WARRANTIES AND BONDS

PART 1 GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. This Section specifies general administrative and procedural requirements for warranties and bonds required by the Contract Documents, including manufacturers standard warranties on products and special warranties.
 - 1. Refer to the General Conditions for terms of the Contractors special warranty of workmanship and materials.
 - 2. General close-out requirements are included in Section Project Close-Out.
 - 3. Specific requirements for warranties for the Work and products and installations that are specified to be warranted, are included in the individual Sections of Division 2 through 16 as required.
 - 4. Certifications and other commitments and agreements for continuing services to Owner are specified elsewhere in the Contract Documents.
- B. Disclaimers and Limitations: Manufacturers disclaimers and limitations on product warranties to not relieve the Contractor of the warranty on the Work that incorporates the products, nor does it relieve suppliers, manufacturers, and subcontractors required do countersign special warranties with the Contractor.

1.03 WARRANTY REQUIREMENTS

- A. Related Damages and Losses: When correcting warranted Work that has failed, remove and replace other Work that has been damaged as a result of such failure or that must be removed and replaced to provide access for correction of warranted Work.
- B. Reinstatement of Warranty. When Work covered by a warranty has failed and been corrected by replacement or rebuilding, reinstate the warranty by written endorsement. The reinstated warranty shall be equal to the

original warranty with an equitable adjustment for depreciation.

- C. Replacement Cost: Upon determination that Work covered by a warranty has failed, replace or rebuild the Work to an acceptable condition complying with requirements of Contract Documents.
- D. Owners Recourse: Written warranties made to the Owner are in addition to implied warranties, and shall not limit the duties, obligation, rights and remedies otherwise available under the law, nor shall warranty periods be interpreted as limitations on time in which the Owner can enforce such other duties, obligations, rights, or remedies.
 - 1. Rejection of Warranties: The Owner reserves the right to reject warranties and to limit selections to products with warranties not in conflict with requirements of the Contract Documents.
- E. The Owner reserves the right to refuse to accept Work for the Project where a special warranty, certification, or similar commitment is required on such Work or part of the Work, until evidence is presented that entities required to countersign such commitments are willing to do so.

1.04 WARRANTY PERIOD

- A. The Contractor shall participate with the County and the Architects representative, at the beginning of the tenth month of the warranty period, in conducting an on site review and evaluation of all items of equipment, materials and workmanship covered by the warranties and guarantees. Contractor shall act promptly and without cost to the County to correct all defects, problems, or deficiencies determined as such by the Architect/Owner during on the site review.
- B. All warranties and guarantees shall commence on the date of Substantial Completion except for items which are determined by the County to be incomplete or a non-comply status at the time of Substantial Completion. The coverage commencement date for warranties and guarantees of such work shall be the date of the Countys acceptance of that work.
- C. Warranty period shall be manufacturers standard for product specified except where specific warranty periods are specified in individual sections. But in no case less than one year.

1.05 SUBMITTALS

- A. Submit written warranties to the Owner prior to the date certified for Substantial Completion. If the Architects Certificate of Substantial Completion designates a commencement date for warranties other than

the date of Substantial Completion for the Work, or a designated portion of the Work, submit written warranties upon request of the Project Manager.

1. When a designated portion of the Work is completed and occupied or used by the Owner, by separate agreement with the Contractor during the construction period, submit properly executed warranties to the Project Manager within fifteen (15) days of completion of that designated portion of the Work.
- B. When a special warranty is required to be executed by the Contractor, or the Contractor and a subcontractor, supplier or manufacturer, prepared a written document that contains appropriate terms and identification, ready for execution by the required parties. Submit a draft to the Owner through the Architect for approval prior to final execution.
1. Refer to individual Sections of Division 2 through 16 for specific content requirements, and particular requirements for submittal of special warranties.
- C. Form of Submittal: At Final Completion compile two (2) copies of each required warranty and bond properly executed by the Contractor, or by the subcontractor, supplier or manufacturer. Organize the warranty documents into an orderly sequence based on the table of contents of the Project Manual.
- D. Bind (3) three sets of warranties and bonds in heavy-duty, commercial quality, durable 3-ring vinyl covered loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8 1/2" by 11" paper.
1. Provide heavy paper dividers with Celluloid covered tabs for each separate warranty. Mark the tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product, and the name, address and telephone number of the installer.
 2. Identify each binder on the front and the spine with the typed or printed title WARRANTIES AND BONDS, the Project title or name, and the name of the Contractor.
 3. When operating and maintenance manuals are required for warranted construction, provide additional copies of each required warranty, as necessary, for inclusion in each required manual.

PART 2 PRODUCTS (Not Applicable)

PART 3 EXECUTION (Not Applicable)

END OF SECTION 01740

SECTION 02270 - EROSION AND SEDIMENTATION

PART 1 - GENERAL

1.1 DESCRIPTION

- A. All erosion, sedimentation and water pollution control features shall be in place or relocated as designated on the plans prior to the start of any clearing, grubbing, grading or construction. Contractor shall be responsible for the installation and maintenance of all temporary erosion control features.
- B. Location of the control features shall be in accordance with the Drawings or as required to facilitate drainage and control erosion and sedimentation within and adjacent to the site.
- C. Control features are defined as, but not limited to, swales, berms, silt fences, silt barriers and temporary fences.

1.2 QUALITY ASSURANCE

- A. The provision for prevention, control and abatement of erosion, sedimentation and water pollution shall be as stated in the Florida Department of Transportation Standard Specifications for Road and Bridge Construction, Section 104, latest edition.

1.3 SUBMITTALS

- A. Product data: Manufacturers literature, application instructions and samples.
- B. List of materials and their characteristics for other erosion control items.

1.4 CONTROL OF CONTRACTOR'S OPERATIONS WHICH MAY RESULT IN WATER POLLUTION

- A. Take sufficient precautions to prevent pollution of streams, canals, lakes, reservoirs, wetlands and other sensitive areas with silt, sediment, fuels, oils, bitumens, calcium chloride, or other harmful materials. Conduct and schedule operations so as to avoid or otherwise minimize pollution or siltation of such streams, etc. and to avoid interference with movement of migratory fish. Do not dump the residue from dust collectors or washers into any water body.
- B. Construction operations in rivers, streams, lakes, tidal waters, reservoirs, canals, and other impoundments shall be restricted to those areas where it is necessary to

perform filling or excavation to accomplish the work shown in the Contract Documents and to those areas which must be entered to construct temporary or permanent structures. As soon as conditions permit, promptly clear rivers, streams, and impoundments of all obstructions placed therein or caused by construction operations.

- C. Except as necessary for construction, do not deposit excavated material in rivers, streams, canals, or impoundments, or in a position close enough thereto, to be washed away by high water or run-off.
- D. Where pumps are used to remove highly turbid waters from enclosed construction areas such as cofferdams or forms, treat the water prior to discharge into State waters. Pump the water into grassed swales, appropriately vegetated areas, or sediment basins, or confine it by an appropriate enclosure such as siltation curtains when other methods are not considered appropriate. Do not contaminate State waters. The background condition of all waters to be discharged from the site must be tested prior to discharge. All waters discharged from the site must be approved through Orange County Environmental Department by the Engineer.
- E. Do not disturb lands or waters outside the limits of construction, unless approved in advance and in writing by the Owner. No operations within non-permitted wetlands or upland buffers are allowed.

1.5 START OF WORK

- A. Do not start work until erosion control measures are in place.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Silt Barriers:
 - 1. Two types of silt barriers shall be installed in accordance with the plans: silt barriers installed on the ground and floating silt barriers.
 - 2. Silt barriers (filter fabric) shall be synthetic and contain ultraviolet ray inhibitors and stabilizers to provide a minimum of six (6) months of expected usable construction life at a temperature range of 0 to 120EF.
 - 3. Filter fabric shall be a pervious sheet of propylene, nylon or polyester and shall be certified by the manufacturer or supplier to conform to the following specifications:
 - Filter efficiency (Test VTM-51): 75%.
 - Minimum tensile strength at 20% elongation (Test ASTM-D-1682): 120 lbs.
 - Tear strength (Test ASTM D2263): 50 lbs.
 - 4. Contractor shall submit further filter fabric material specifications and installation configuration prior to start of construction.
 - 5. Silt barriers shall be maintained in place.

6. Filter fabric shall be purchased in a continuous roll cut to the length of the barrier to avoid the use of joints. When joints are necessary, filter fabric shall be spliced together only at a support post, with a 6 inch overlap, and securely sealed.
 7. The following items shall be installed and maintained in accordance with the applicable sections of the FDOT Standard Specifications:
 - a. Temporary silt fences and staked silt barriers
 - b. Floating silt barrier
- B. Temporary Fence
1. Brightly colored fence as manufactured by Mirafi, product Mirasafe, or approved equal.
 2. Material shall be 4' high, attached to 6' metal posts at 12' centers. Posts shall be driven 18" into ground.

PART 3 - EXECUTION

3.1 GENERAL

- A. Temporary erosion control features shall consist of, but not be limited to, temporary grassing, temporary sodding, temporary mulching, sandbagging, slope drains, sediment basins, artificial coverings, berms, baled hay or straw, floating silt barriers, staked silt barriers and staked silt fences. Design details for some of these items may be found in the Water Quality Section of the applicable edition of the FDOT Roadway and Traffic Design Standards. All of these items shall be constructed in accordance with applicable sections of the FDOT Standard Specifications.
- B. Incorporate permanent erosion control features into the project at the earliest practical time. Correct conditions, using temporary measures, that develop during construction to control erosion prior to the time it is practical to construct permanent control features.
- C. Construct temporary and permanent erosion and sediment control measures and maintain them to prevent the pollution of adjacent water ways in conformance with the laws, rules and regulations of Federal, State and local agencies.
- D. Copies of approved permits will be provided to the Contractor for his review and use. Contractor shall be required to comply with all General and Special Conditions noted within the permit by the particular permitting agency. The Contractor shall maintain copies of these permits on the job site at all times.

3.2 INSTALLATION

The following items shall be installed in accordance with the FDOT Standard Specification. The procedures are only generally described herein.

- A. Temporary Grassing: This work shall consist of furnishing and placing grass seed.
- B. Temporary Sod: This work shall consist of furnishing and placing sod.
- C. Temporary Mulching: This work shall consist of furnishing and applying a two-inch to four-inch thick blanket of straw or hay mulch and then mixing or forcing the mulch into the top two inches of the soil in order to temporarily control erosion. Only undecayed straw or hay, which can readily be cut into the soil, shall be used. Other measures for temporary erosion control such as hydro-mulching, chemical adhesive soils stabilizers, etc., may be substituted for mulching with straw or hay with the approval of the Owner. When permanent grassing operations begin, temporary mulch materials shall be plowed under in conjunction with preparation of the ground.
- D. Sandbagging: This work shall consist of furnishing and placing sandbags in configurations, so as to control erosion and siltation.
- E. Slope Drains: This work shall consist of constructing slope drains, utilizing pipe, fiber mats, rubble, cement concrete, asphaltic concrete plastic sheeting, or other acceptable materials, in accordance with the details shown in FDOT's Roadway and Traffic Design Standards or as may be approved as suitable to adequately perform the intended function.
- F. Sediment Basins: Sediment basins shall be constructed in accordance with the details shown in FDOT's Roadway and Traffic Design Standards or as suitable to adequately perform the intended function. Sediment basins shall be cleaned out as necessary.
- G. Artificial Coverings: This work shall consist of furnishing and applying fiber mats, netting, plastic sheeting, or other approved covering to the earth surfaces.
- H. Berms: This work shall consist of construction of temporary earth berms to divert the flow of water from an erodible surface.
 - 1. This work shall consist of construction of baled hay or straw dams or earth berms to protect against downstream accumulations of silt. The baled hay or straw dams shall be constructed in accordance with the details shown in FDOT's Roadway and Traffic Design Standards.
 - 2. The berm or dam shall be placed so as to effectively control silt dispersion under conditions present on this project. Alternate solutions and usage of materials may be used if approved.

3.3 SILT BARRIERS

- A. Silt barriers shall be installed and maintained at the locations shown on the plans. The Contractor is required to prevent the possibility of silting onto any adjacent parcel.
- B. Silt barrier shall be of the staked type and stakes shall be installed as indicated in the drawings.
- C. The height of the silt barrier fabric shall be a minimum of 42 inches.
- D. The stakes shall be 2 inch x 4 inch wood, 5 feet long and shall be spaced a maximum of 10 feet apart at the barrier location and driven securely into the ground.
- E. A trench shall be excavated approximately 4 inches wide by 4 inches deep along the line of stakes. The filter fabric shall be tied or stapled to the wooden stakes and 8 inches of fabric shall be extended into the trench. The staples shall be heavy duty wire and at least one-half (1/2) inch long. The trench shall then be backfilled and the soil compacted over the filter fabric.

3.4 FLOATING SILT BARRIERS

- A. Floating silt barriers where required shall be in place prior to the start of any construction or grading.
- B. Floating silt barriers shall meet or exceed the Florida Department of Transportation Roadway and Traffic Design Standards, Index No. 102, Floating Silt Barrier. Contractor shall submit fabric filter material specifications and installation configuration for approval prior to the start of construction.

3.5 TEMPORARY FENCE

- A. Furnish, install and maintain on wetland lines, buffer lines, tree save lines and otherwise as shown on plans. Attach silt barrier to the temporary fence.
- B. Follow manufacturer's installation recommendations.

3.6 MAINTENANCE

- A. Silt barriers and temporary fences shall be inspected immediately after each rainfall and at least once a day during periods of prolonged rainfall. Any repairs shall be made immediately.
- B. Should the fabric on a silt barrier or temporary fence decompose or become ineffective, the installation shall be repaired or replaced immediately at no additional

cost to the Owner. If the Contractor fails to repair or replace the items as above, the Owner shall have the right to stop work without additional cost to the Owner until such time as the repair or replacement has been made.

- C. Sediment deposits shall be removed after each storm event. The Contractor will repair and restore the installations to a working and effective condition to the satisfaction of the Owner.
- D. At the completion of all work, the silt barriers and the temporary fences will be removed if by the Owner.
- E. Any sediment deposits in place after the silt fence or filter barrier is no longer required shall be dressed to conform to the existing grade and prepared for seeding or sodding.

3.7 PROTECTION DURING SUSPENSION OF CONTRACT TIME

- A. In the event that it is necessary that the construction operations be suspended for any appreciable length of time, shape the top of the earthwork in such a manner as to permit run-off of rainwater and construct earth berms along the top edges of embankments to intercept run-off water. Provide temporary slope drains to carry run-off from cuts and embankments which are located in the vicinity of rivers, streams, canals, lakes and impoundments. Should such preventative measures fail, immediately take such other action as necessary to effectively prevent erosion and siltation.

END OF SECTION

SECTION 03300- CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division 2 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section specifies cast-in place concrete, including formwork, reinforcing, mix design, placement procedures, and finishes.
- B. Concrete paving and walks are specified in Division 2.

1.3 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division 2 Specification Sections.
- B. Product data for proprietary materials and items, including reinforcement and forming accessories, admixtures, patching compounds, curing compounds, and others as requested by Engineer.
- C. Laboratory test reports for concrete materials and mix design test.
- D. Materials certificates in lieu of materials laboratory test reports when permitted by Architect. Materials certificates shall be signed by manufacturer and Contractor, certifying that each material item complies with or exceeds specified requirements. Provide certification from admixture manufacturers that chloride content complies with specification requirements.
- E. Minutes of pre-construction conference.

1.4 QUALITY ASSURANCE

- A. Codes and Standards: Comply with provisions of following codes, specifications, and standards, except where more stringent requirements are shown or specified:
 - 1. ACI 318, "Building Code Requirements for Reinforced Concrete."
 - 2. Concrete Reinforcing Steel Institute (CRSI), "Manual of Standard Practice."
- B. Concrete Testing Service: Orange County will employ a testing laboratory to perform material evaluation tests and to design concrete mixes.

- C. Materials and installed work may require testing and retesting at any time during progress of work. Tests, including retesting of rejected materials for installed work, shall be done at Contractor's expense.

PART 2 - PRODUCTS

2.1 REINFORCING MATERIALS

- A. Reinforcing Bars: ASTM A 615, Grade 60, deformed.
- B. Welded Wire Fabric: ASTM A 185, welded steel wire fabric.
- C. Supports for Reinforcement: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars and welded wire fabric in place. Use wire-bar-type supports complying with CRSI specifications.
 - 1. For slabs-on-grade, use supports with sand plates or horizontal runners where base material will not support chair legs.
 - 2. For exposed-to-view concrete surfaces, where legs of supports are in contact with forms, provide supports with legs that are plastic protected (CRSI, Class 1) or stainless steel protected (CRSI, Class 2).

2.2 CONCRETE MATERIALS

- A. Portland Cement: ASTM C 150, Type I.
 - 1. Use one brand of cement throughout project unless otherwise acceptable to Engineer.
- B. Fly Ash: ASTM C 618, Type C or Type F.
- C. Normal Weight Aggregates: ASTM C 33 and as herein specified. Provide aggregates from a single source for exposed concrete.
 - 1. For exterior exposed surfaces, do not use fine or coarse aggregates containing spalling-causing deleterious substances.
- D. Lightweight Aggregates: ASTM C 330.
- E. Water: Drinkable.
- F. Admixtures, General: Provide admixtures for concrete that contain not more than 0.1 percent chloride ions.
- G. Air-Entraining Admixture: ASTM C 260, certified by manufacturer to be compatible

with other required admixtures.

1. Available Products: Subject to compliance with requirements, products that may be incorporated in the work include, but are not limited to, the following:
 - a. "Air-Tite," Cormix.
 - b. "Air-Mix" or "Perma-Air," Euclid Chemical Co.
 - c. "Darex AEA" or "Daravair," W.R. Grace & Co.
 - d. "MB-VR" or "Micro-Air," Master Builders, Inc.
 - e. "Sealtight AEA," W.R. Meadows, Inc.
 - f. "Sika AER," Sika Corp.

- H. Water-Reducing Admixture: ASTM C 494, Type A.
 1. Available Products: Subject to compliance with requirements, products that may be incorporated in the work include, but are not limited to, the following:
 - a. "Chemtard," ChemMasters Corp.
 - b. "PSI N," Cormix.
 - c. "Eucon WR-75," Euclid Chemical Co.
 - d. "WRDA," W.R. Grace & Co.
 - e. "Pozzolith Normal" or "Polyheed," Master Builders, Inc.
 - f. "Prokrete-N," Prokrete Industries.
 - g. "Plastocrete 161," Sika Corp.

- I. High-Range Water-Reducing Admixture (Super Plasticizer): ASTM C 494, Type F or Type G.
 1. Available Products: Subject to compliance with requirements, products that may be incorporated in the work include, but are not limited to, the following:
 - a. "Super P," Anti-Hydro Co., Inc.
 - b. "PSI Super," Cormix.
 - c. "Eucon 37," Euclid Chemical Co.
 - d. "WRDA 19" or "Daracem," W.R. Grace & Co.
 - e. "Rheobuild," Master Builders, Inc.
 - f. "PSP," Prokrete Industries.
 - g. "Sikament 300," Sika Corp.

- J. Water-Reducing, Accelerating Admixture: ASTM C 494, Type E.
 1. Available Products: Subject to compliance with requirements, products that may be incorporated in the work include, but are not limited to, the following:
 - a. "Q-Set," Conspec Marketing & Manufacturing Co.
 - b. "Gilco Accelerator," Cormix.

- c. "Accelguard 80," Euclid Chemical Co.
 - d. "Daraset," W.R. Grace & Co.
 - e. "Pozzutec 20," Master Builders, Inc.
- K. Water-Reducing, Retarding Admixture: ASTM C 494, Type D.
- 1. Available Products: Subject to compliance with requirements, products that may be incorporated in the work include, but are not limited to, the following:
 - a. "PSI-R Plus," Cormix.
 - b. "Eucon Retarder 75," Euclid Chemical Co.
 - c. "Daratard-17," W.R. Grace & Co.
 - d. "Pozzolith R," Master Builders, Inc.
 - e. "Protard," Prokrete Industries.
 - f. "Plastiment," Sika Corporation.
- L. Fibrous Reinforcement: Engineered polypropylene fibers designed for secondary reinforcement of concrete slabs.
- 1. Available Products: Subject to compliance with requirements, products that may be incorporated in the work include, but are not limited to, the following:
 - a. "Fiberstrand 100," Euclid Chemical Co.
 - b. "Fibermesh," Fibermesh, Inc.
 - c. "Forta CR," Forta Corp.
 - d. "Grace Fibers," W.R. Grace & Co.

2.3 RELATED MATERIALS

- A. Vapor Retarder: Provide vapor retarder cover over prepared base material where indicated below slabs on grade. Use only materials that are resistant to deterioration when tested in accordance with ASTM E 154, as follows:
- 1. Polyethylene sheet not less than 8 mils thick.
- B. Moisture-Retaining Cover: One of the following, complying with ASTM C 171.
- 1. Waterproof paper.
 - 2. Polyethylene film.
 - 3. Polyethylene-coated burlap.
- C. Liquid Membrane-Forming Curing Compound: Liquid-type membrane-forming curing compound complying with ASTM C 309, Type I, Class A. Moisture loss not more than 0.055 gr./sq. cm. when applied at 200 sq. ft./gal.
- 1. Available Products: Subject to compliance with requirements, products that may

be incorporated in the work include, but are not limited to, the following:

- a. "A-H 3 Way Sealer," Anti-Hydro Co., Inc.
 - b. "Spartan-Cote," The Burke Co.
 - c. "Conspec #1," Conspec Marketing & Mfg. Co.
 - d. "Hardtop," Cormix.
 - e. "Day-Chem Cure and Seal," Dayton Superior Corp.
 - f. "Euco cure," Euclid Chemical Co.
 - g. "Horn Clear Seal," A.C. Horn, Inc.
 - h. "L&M Cure," L & M Construction Chemicals, Inc.
 - i. "Masterkure," Master Builders, Inc.
 - j. "CS-309," W.R. Meadows, Inc.
 - k. "LR-151," Prokrete Industries.
 - l. "Kure-N-Seal," Sonneborn-Rexnord.
 - m. "Stontop CS2," Stonhard, Inc.
- D. Evaporation Control: Monomolecular film-forming compound applied to exposed concrete slab surfaces for temporary protection from rapid moisture loss.
1. Available Products: Subject to compliance with requirements, products that may be incorporated in the work include, but are not limited to, the following:
 - a. "Euco bar," Euclid Chemical Co.
 - b. "E-Con," L&M Construction Chemicals, Inc.
 - c. "Confilm," Master Builders, Inc.
- E. Bonding Compound: Polyvinyl acetate or acrylic base.
1. Available Products: Subject to compliance with requirements, products that may be incorporated in the work include, but are not limited to, the following:
 - a. Polyvinyl Acetate (Interior Only):
 - 1) "Superior Concrete Bonder," Dayton Superior Corp.
 - 2) "Euco Weld," Euclid Chemical Co.
 - 3) "Weld-Crete," Larsen Products Corp.
 - 4) "Everweld," L&M Construction Chemicals, Inc.
 - b. Acrylic or Styrene Butadiene:
 - 1) "Acrylic Bondcrete," The Burke Co.
 - 2) "Strongbond," Conspec Marketing and Mfg. Co.
 - 3) "Day-Chem Ad Bond," Dayton Superior Corp.
 - 4) "SBR Latex," Euclid Chemical Co.
 - 5) "Daraweld C," W.R. Grace & Co.
 - 6) "Hornweld," A.C. Horn, Inc.

- 7) "Everbond," L & M Construction Chemicals, Inc.
 - 8) "Acryl-Set," Master Builders Inc.
 - 9) "Intralok," W.R. Meadows, Inc.
 - 10) "Sonocrete," Sonneborn-Rexnord.
 - 11) "Stonlock LB2," Stonhard, Inc.
- F. Epoxy Adhesive: ASTM C 881, two-component material suitable for use on dry or damp surfaces. Provide material "Type," "Grade," and "Class" to suit project requirements.
1. Available Products: Subject to compliance with requirements, products that may be incorporated in the work include, but are not limited to, the following:
 - a. "Burke Epoxy M.V.," The Burke Co.
 - b. "Spec-Bond 100," Conspec Marketing and Mfg. Co.
 - c. "Euco Epoxy System #452 or #620," Euclid Chemical Co.
 - d. "Epoxite Binder 2390," A.C. Horn, Inc.
 - e. "Epubond," L&M Construction Chemicals, Inc.
 - f. "Concresive 1001," Master Builders, Inc.
 - g. "Sikadur 32 Hi-Mod," Sika Corp.

2.4 PROPORTIONING AND DESIGN OF MIXES

- A. Prepare design mixes for each type and strength of concrete by either laboratory trial batch or field experience methods as specified in ACI 301. If trial batch method used, use an independent testing facility acceptable to Architect for preparing and reporting proposed mix designs. The testing facility shall not be the same as used for field quality control testing.
1. Limit use of fly ash to not exceed 25 percent of cement content by weight.
- B. Submit written reports to Architect of each proposed mix for each class of concrete at least 15 days prior to start of work. Do not begin concrete production until proposed mix designs have been reviewed by Architect.
- C. Design mixes to provide normal weight concrete with the following properties, as indicated on drawings and schedules:
1. Slab-On-Grade: 4000-psi, 28-day compressive strength; W/C ratio, 0.44 maximum (non-air-entrained), 0.35 maximum (air-entrained).
 2. Foundations: 3000-psi, 28-day compressive strength; W/C ratio, 0.58 maximum (non-air-entrained), 0.46 maximum (air-entrained).
- D. Adjustment to Concrete Mixes: Mix design adjustments may be requested by Contractor when characteristics of materials, job conditions, weather, test results, or other circumstances warrant, as accepted by Engineer. Laboratory test data for

revised mix design and strength results must be submitted to and accepted by Architect before using in work.

2.5 ADMIXTURES

- A. Use water-reducing admixture or high-range water-reducing admixture (Superplasticizer) in concrete as required for placement and workability.
- B. Use nonchloride accelerating admixture in concrete slabs placed at ambient temperatures below 50 deg F (10 deg C).
- C. Use high-range water-reducing admixture (HRWR) in pumped concrete, concrete for industrial slabs, architectural concrete, parking structure slabs, concrete required to be watertight, and concrete with water/cement ratios below 0.50.
- D. Use air-entraining admixture in exterior exposed concrete unless otherwise indicated. Add air-entraining admixture at manufacturer's prescribed rate to result in concrete at point of placement having total air content with a tolerance of plus or minus 1-1/2 percent within following limits:
 - 1. Concrete structures and slabs exposed to freezing and thawing, deicer chemicals, or hydraulic pressure:
 - a. 5.0 percent (moderate exposure); 6.0 percent (severe exposure) 3/4-inch max. aggregate.
 - b. 5.5 percent (moderate exposure); 7.0 percent (severe exposure) 1/2-inch max. aggregate.
 - 2. Other concrete (not exposed to freezing, thawing, or hydraulic pressure) or to receive a surface hardener: 2 percent to 4 percent air.
- E. Use admixtures for water reduction and set control in strict compliance with manufacturer's directions.
- F. Water-Cement Ratio: Provide concrete for following conditions with maximum water-cement (W/C) ratios as follows:
 - 1. Subjected to freezing and thawing; W/C 0.45.
- G. Slump Limits: Proportion and design mixes to result in concrete slump at point of placement as follows:
 - 1. Ramps, slabs, and sloping surfaces: Not more than 3 inches.
 - 2. Reinforced foundation systems: Not less than 1 inch and not more than 3 inches.
 - 3. Concrete containing HRWR admixture (Superplasticizer): Not more than 8 inches after addition of HRWR to site-verified 2-inch to 3-inch slump concrete.
 - 4. Other concrete: Not more than 4 inches.

2.6 CONCRETE MIXING

- A. Ready-Mix Concrete: Comply with requirements of ASTM C 94, and as specified.
 - 1. When air temperature is between 85 deg F (30 deg C) and 90 deg F (32 deg C), reduce mixing and delivery time from 1-1/2 hours to 75 minutes, and when air temperature is above 90 deg F (32 deg C), reduce mixing and delivery time to 60 minutes.

PART 3 - EXECUTION

3.1 FORMS

- A. General: Design, erect, support, brace, and maintain formwork to support vertical and lateral, static and dynamic loads that might be applied until concrete structure can support such loads. Construct formwork so concrete members and structures are of correct size, shape, alignment, elevation, and position. Maintain formwork construction tolerances complying with ACI 347.
- B. Construct forms to sizes, shapes, lines, and dimensions shown and to obtain accurate alignment, location, grades, level, and plumb work in finished structures. Provide for openings, offsets, sinkages, keyways, recesses, moldings, rustications, reglets, chamfers, blocking, screeds, bulkheads, anchorages and inserts, and other features required in work. Use selected materials to obtain required finishes. Solidly butt joints and provide backup at joints to prevent leakage of cement paste.
- C. Fabricate forms for easy removal without hammering or prying against concrete surfaces. Provide crush plates or wrecking plates where stripping may damage cast concrete surfaces. Provide top forms for inclined surfaces where slope is too steep to place concrete with bottom forms only. Kerf wood inserts for forming keyways, reglets, recesses, and the like, for easy removal.
- D. Provide temporary openings where interior area of formwork is inaccessible for cleanout, for inspection before concrete placement, and for placement of concrete. Securely brace temporary openings and set tightly to forms to prevent loss of concrete mortar. Locate temporary openings in forms at inconspicuous locations.
- E. Chamfer exposed corners and edges as indicated, using wood, metal, PVC, or rubber chamfer strips fabricated to produce uniform smooth lines and tight edge joints.
- F. Provisions for Other Trades: Provide openings in concrete formwork to accommodate work of other trades. Determine size and location of openings, recesses, and chases from trades providing such items. Accurately place and securely support items built into forms.

- G. Cleaning and Tightening: Thoroughly clean forms and adjacent surfaces to receive concrete. Remove chips, wood, sawdust, dirt, or other debris just before concrete is placed. Retighten forms and bracing before concrete placement as required to prevent mortar leaks and maintain proper alignment.

3.2 VAPOR RETARDER/BARRIER INSTALLATION

- A. General: Following leveling and tamping of granular base for slabs on grade, place vapor retarder/barrier sheeting with longest dimension parallel with direction of pour.
- B. Lap joints 6 inches and seal vapor barrier joints with manufacturers' recommended mastic and pressure-sensitive tape.
- C. After placement of vapor retarder/barrier, cover with sand cushion and compact to depth as shown on drawings.

3.3 PLACING REINFORCEMENT

- A. General: Comply with Concrete Reinforcing Steel Institute's recommended practice for "Placing Reinforcing Bars," for details and methods of reinforcement placement and supports and as herein specified.
 - 1. Avoiding cutting or puncturing vapor retarder during reinforcement placement and concreting operations.
- B. Clean reinforcement of loose rust and mill scale, earth, ice, and other materials that reduce or destroy bond with concrete.
- C. Accurately position, support, and secure reinforcement against displacement. Locate and support reinforcing by metal chairs, runners, bolsters, spacers, and hangers, as accepted by Architect.
- D. Place reinforcement to obtain at least minimum coverages for concrete protection. Arrange, space, and securely tie bars and bar supports to hold reinforcement in position during concrete placement operations. Set wire ties so ends are directed into concrete, not toward exposed concrete surfaces.
- E. Install welded wire fabric in as long lengths as practicable. Lap adjoining pieces at least one full mesh and lace splices with wire. Offset laps of adjoining widths to prevent continuous laps in either direction.

3.4 JOINTS

- A. Use bonding agent on existing concrete surfaces that will be joined with fresh concrete.

- B. Joint sealant material is specified in Division 2 Sections of these specifications.

3.5 INSTALLATION OF EMBEDDED ITEMS

- A. General: Set and build into work anchorage devices and other embedded items required for other work that is attached to or supported by cast-in-place concrete. Use setting drawings, diagrams, instructions, and directions provided by suppliers of items to be attached thereto.
- B. Forms for Slabs: Set edge forms and bulkheads, for slabs to obtain required elevations and contours in finished surfaces.

3.6 PREPARATION OF FORM SURFACES

- A. General: Coat contact surfaces of forms with an accepted, nonresidual, low-VOC, form-coating compound before reinforcement is placed.
- B. Do not allow excess form-coating material to accumulate in forms or to come into contact with in-place concrete surfaces against which fresh concrete will be placed. Apply in compliance with manufacturer's instructions.

3.7 CONCRETE PLACEMENT

- A. Inspection: Before placing concrete, inspect and complete formwork installation, reinforcing steel, and items to be embedded or cast in. Notify other crafts to permit installation of their work; cooperate with other trades in setting such work.
- B. General: Comply with ACI 304, "Recommended Practice for Measuring, Mixing, Transporting, and Placing Concrete," and as herein specified.
- C. Deposit concrete continuously or in layers of such thickness that no concrete will be placed on concrete that has hardened sufficiently to cause the formation of seams or planes of weakness. If a section cannot be placed continuously, provide construction joints as herein specified. Deposit concrete to avoid segregation at its final location.
- D. Placing Concrete in Forms: Deposit concrete in forms in horizontal layers not deeper than 24 inches and in a manner to avoid inclined construction joints. Where placement consists of several layers, place each layer while preceding layer is still plastic to avoid cold joints.
 - 1. Consolidate placed concrete by mechanical vibrating equipment supplemented by hand-spading, rodding, or tamping. Use equipment and procedures for consolidation of concrete in accordance with ACI 309.
 - 2. Do not use vibrators to transport concrete inside forms. Insert and withdraw vibrators vertically at uniformly spaced locations not farther than visible

effectiveness of machine. Place vibrators to rapidly penetrate placed layer and at least 6 inches into preceding layer. Do not insert vibrators into lower layers of concrete that have begun to set. At each insertion limit duration of vibration to time necessary to consolidate concrete and complete embedment of reinforcement and other embedded items without causing segregation of mix.

- E. Placing Concrete Slabs: Deposit and consolidate concrete slabs in a continuous operation, within limits of construction joints, until the placing of a panel or section is completed.
1. Consolidate concrete during placing operations so that concrete is thoroughly worked around reinforcement and other embedded items and into corners.
 2. Bring slab surfaces to correct level with straightedge and strike off. Use bull floats or darbies to smooth surface, free of humps or hollows. Do not disturb slab surfaces prior to beginning finishing operations.
 3. Maintain reinforcing in proper position during concrete placement.
- F. Cold-Weather Placing: Comply with provisions of ACI 306 and as follows. Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures.
- G. When air temperature has fallen to or is expected to fall below 40 deg F (4 deg C), uniformly heat water and aggregates before mixing to obtain a concrete mixture temperature of not less than 50 deg F (10 deg C) and not more than 80 deg F (27 deg C) at point of placement.
1. Do not use frozen materials or materials containing ice or snow. Do not place concrete on frozen subgrade or on subgrade containing frozen materials.
 2. Do not use calcium chloride, salt, and other materials containing antifreeze agents or chemical accelerators unless otherwise accepted in mix designs.
- H. Hot-Weather Placing: When hot weather conditions exist that would seriously impair quality and strength of concrete, place concrete in compliance with ACI 305 and as herein specified.
1. Cool ingredients before mixing to maintain concrete temperature at time of placement below 90 deg F (32 deg C). Mixing water may be chilled, or chopped ice may be used to control temperature provided water equivalent of ice is calculated to total amount of mixing water. Use of liquid nitrogen to cool concrete is Contractor's option.
 2. Cover reinforcing steel with water-soaked burlap if it becomes too hot, so that steel temperature will not exceed the ambient air temperature immediately before embedment in concrete.
 3. Fog spray forms, reinforcing steel, and subgrade just before concrete is placed.
 4. Use water-reducing retarding admixture when required by high temperatures, low humidity, or other adverse placing conditions, when acceptable to Architect.

3.8 FINISH OF FORMED SURFACES

- A. Rough Form Finish: For formed concrete surfaces not exposed to view in the finish work or concealed by other construction. This is the concrete surface having texture imparted by form-facing material used, with tie holes and defective areas repaired and patched and fins and other projections exceeding 1/4 inch in height rubbed down or chipped off.
- B. Smooth Form Finish: For formed concrete surfaces exposed to view or to be covered with a coating material applied directly to concrete, or a covering material applied directly to concrete, such as waterproofing, dampproofing, veneer plaster, painting, or other similar system. This is an as-cast concrete surface obtained with selected form-facing material, arranged in an orderly and symmetrical manner with a minimum of seams. Repair and patch defective areas with fins and other projections completely removed and smoothed.
- C. Related Unformed Surfaces: At tops of walls, horizontal offsets, and similar unformed surfaces occurring adjacent to formed surfaces, strike-off smooth and finish with a texture matching adjacent formed surfaces. Continue final surface treatment of formed surfaces uniformly across adjacent unformed surfaces unless otherwise indicated.

3.9 MONOLITHIC SLAB FINISHES

- A. Scratch Finish: Apply scratch finish to monolithic slab surfaces to receive concrete floor topping or mortar setting beds for tile, portland cement terrazzo, and other bonded applied cementitious finish flooring material, and as otherwise indicated.
- B. After placing slabs, plane surface to tolerances for floor flatness (Ff) of 15 and floor levelness (FI) of 13. Slope surfaces uniformly to drains where required. After leveling, roughen surface before final set with stiff brushes, brooms, or rakes.
- C. Float Finish: Apply float finish to monolithic slab surfaces to receive trowel finish and other finishes as hereinafter specified; slab surfaces to be covered with membrane or elastic waterproofing, membrane or elastic roofing, or sand-bed terrazzo; and as otherwise indicated.
 - 1. After screeding, consolidating, and leveling concrete slabs, do not work surface until ready for floating. Begin floating, using float blades or float shoes only, when surface water has disappeared, when concrete has stiffened sufficiently to permit operation of power-driven floats, or both. Consolidate surface with power-driven floats or by hand-floating if area is small or inaccessible to power units. Check and level surface plane to tolerances of Ff 18 - FI 15. Cut down high spots and fill low spots. Uniformly slope surfaces to drains. Immediately after leveling, refloat surface to a uniform, smooth, granular texture.

- D. Trowel Finish: Apply trowel finish to monolithic slab surfaces to be exposed to view and slab surfaces to be covered with resilient flooring, carpet, ceramic or quarry tile, paint, or other thin film finish coating system.
 - 1. After floating, begin first trowel finish operation using a power-driven trowel. Begin final troweling when surface produces a ringing sound as trowel is moved over surface. Consolidate concrete surface by final hand-troweling operation, free of trowel marks, uniform in texture and appearance, and with surface leveled to tolerances of Ff 20 - FI 17. Grind smooth surface defects that would telegraph through applied floor covering system.
- E. Trowel and Fine Broom Finish: Where ceramic or quarry tile is to be installed with thin-set mortar, apply trowel finish as specified, then immediately follow with slightly scarifying surface by fine brooming.
- F. Nonslip Broom Finish: Apply nonslip broom finish to exterior concrete platforms, steps, and ramps, and elsewhere as indicated.
 - 1. Immediately after float finishing, slightly roughen concrete surface by brooming with fiber-bristle broom perpendicular to main traffic route. Coordinate required final finish with Architect before application.

3.10 CONCRETE CURING AND PROTECTION

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. In hot, dry, and windy weather, protect concrete from rapid moisture loss before and during finishing operations with an evaporation-control material. Apply in accordance with manufacturer's instructions after screeding and bull floating, but before power floating and troweling.
- B. Start initial curing as soon as free water has disappeared from concrete surface after placing and finishing. Weather permitting, keep continuously moist for not less than 7 days.
- C. Curing Methods: Perform curing of concrete by curing and sealing compound, by moist curing, by moisture-retaining cover curing, and by combinations thereof, as herein specified.
- D. Provide moisture curing by following methods.
 - 1. Keep concrete surface continuously wet by covering with water.
 - 2. Use continuous water-fog spray.
 - 3. Cover concrete surface with specified absorptive cover, thoroughly saturate cover with water, and keep continuously wet. Place absorptive cover to provide coverage of concrete surfaces and edges, with 4-inch lap over adjacent absorptive covers.

- E. Provide moisture-cover curing as follows:
 - 1. Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width with sides and ends lapped at least 3 inches and sealed by waterproof tape or adhesive. Immediately repair any holes or tears during curing period using cover material and waterproof tape.
- F. Provide curing and sealing compound to exposed interior slabs and to exterior slabs, walks, and curbs as follows:
 - 1. Apply specified curing and sealing compound to concrete slabs as soon as final finishing operations are complete (within 2 hours and after surface water sheen has disappeared). Apply uniformly in continuous operation by power spray or roller in accordance with manufacturer's directions. Recoat areas subjected to heavy rainfall within 3 hours after initial application. Maintain continuity of coating and repair damage during curing period.
 - 2. Use membrane curing compounds that will not affect surfaces to be covered with finish materials applied directly to concrete.
- G. Curing Formed Surfaces: Cure formed concrete surfaces, including underside of beams, supported slabs, and other similar surfaces, by moist curing with forms in place for full curing period or until forms are removed. If forms are removed, continue curing by methods specified above, as applicable.
- H. Curing Unformed Surfaces: Cure unformed surfaces, such as slabs, floor topping, and other flat surfaces, by application of appropriate curing method.
- I. Final cure concrete surfaces to receive liquid floor hardener or finish flooring by use of moisture-retaining cover, unless otherwise directed.

3.11 REMOVAL OF FORMS

- A. General: Formwork not supporting weight of concrete, such as sides of beams, walls, columns, and similar parts of the work, may be removed after cumulatively curing at not less than 50 deg F (10 deg C) for 24 hours after placing concrete, provided concrete is sufficiently hard to not be damaged by form-removal operations, and provided curing and protection operations are maintained.
- B. Formwork supporting weight of concrete, such as beam soffits, joists, slabs, and other structural elements, may not be removed in less than 14 days and until concrete has attained at least 75 percent of design minimum compressive strength at 28 days. Determine potential compressive strength of in-place concrete by testing field-cured specimens representative of concrete location or members.
- C. Form-facing material may be removed 4 days after placement only if shores and other

vertical supports have been arranged to permit removal of form-facing material without loosening or disturbing shores and supports.

3.12 REUSE OF FORMS

- A. Clean and repair surfaces of forms to be reused in work. Split, frayed, delaminated, or otherwise damaged form-facing material will not be acceptable for exposed surfaces. Apply new form-coating compound as specified for new formwork.
- B. When forms are extended for successive concrete placement, thoroughly clean surfaces, remove fins and laitance, and tighten forms to close joints. Align and secure joint to avoid offsets. Do not use "patched" forms for exposed concrete surfaces except as acceptable to Architect.

3.13 MISCELLANEOUS CONCRETE ITEMS

- A. Filling In: Fill in holes and openings left in concrete structures for passage of work by other trades, unless otherwise shown or directed, after work of other trades is in place. Mix, place, and cure concrete as herein specified, to blend with in-place construction. Provide other miscellaneous concrete filling shown or required to complete work.
- B. Curbs: Provide monolithic finish to interior curbs by stripping forms while concrete is still green and steel-troweling surfaces to a hard, dense finish with corners, intersections, and terminations slightly rounded.
- C. Equipment Bases and Foundations: Provide machine and equipment bases and foundations, as shown on drawings. Set anchor bolts for machines and equipment to template at correct elevations, complying with certified diagrams or templates of manufacturer furnishing machines and equipment.
- D. Steel Pan Stairs: Provide concrete fill for steel pan stair treads and landings and associated items. Cast-in safety inserts and accessories as shown on drawings. Screed, tamp, and finish concrete surfaces as scheduled.
- E. Reinforced Masonry: Provide concrete grout for reinforced masonry lintels and bond beams where indicated on drawings and as scheduled. Maintain accurate location of reinforcing steel during concrete placement.

3.14 CONCRETE SURFACE REPAIRS

- A. Patching Defective Areas: Repair and patch defective areas with cement mortar immediately after removal of forms, when acceptable to Engineer.
 - 1. Cut out honeycomb, rock pockets, voids over 1/4 inch in any dimension, and holes left by tie rods and bolts, down to solid concrete but in no case to a depth of less than 1 inch. Make edges of cuts perpendicular to the concrete surface.

- Thoroughly clean, dampen with water, and brush-coat the area to be patched with specified bonding agent. Place patching mortar before bonding compound has dried.
2. For exposed-to-view surfaces, blend white portland cement and standard portland cement so that, when dry, patching mortar will match color surrounding. Provide test areas at inconspicuous location to verify mixture and color match before proceeding with patching. Compact mortar in place and strike-off slightly higher than surrounding surface.
- B. Repair of Formed Surfaces: Remove and replace concrete having defective surfaces if defects cannot be repaired to satisfaction of Engineer. Surface defects, as such, include color and texture irregularities, cracks, spalls, air bubbles, honeycomb, rock pockets, fins and other projections on surface, and stains and other discolorations that cannot be removed by cleaning. Flush out form tie holes, fill with dry-pack mortar, or precast cement cone plugs secured in place with bonding agent.
1. Repair concealed formed surfaces, where possible, that contain defects that affect the durability of concrete. If defects cannot be repaired, remove and replace concrete.
- C. Repair of Unformed Surfaces: Test unformed surfaces, such as monolithic slabs, for smoothness and verify surface plane to tolerances specified for each surface and finish. Correct low and high areas as herein specified. Test unformed surfaces sloped to drain for trueness of slope and smoothness by using a template having required slope.
1. Repair finished unformed surfaces that contain defects that affect durability of concrete. Surface defects, as such, include crazing and cracks in excess of 0.01 inch wide or that penetrate to reinforcement or completely through nonreinforced sections regardless of width, spalling, popouts, honeycomb, rock pockets, and other objectionable conditions.
 2. Correct high areas in unformed surfaces by grinding after concrete has cured at least 14 days.
 3. Correct low areas in unformed surfaces during or immediately after completion of surface finishing operations by cutting out low areas and replacing with patching compound. Finish repaired areas to blend into adjacent concrete. Proprietary underlayment compounds may be used when acceptable to Architect.
 4. Repair defective areas, except random cracks and single holes not exceeding 1 inch in diameter, by cutting out and replacing with fresh concrete. Remove defective areas to sound concrete with clean, square cuts and expose reinforcing steel with at least 3/4-inch clearance all around. Dampen concrete surfaces in contact with patching concrete and apply bonding compound. Mix patching concrete of same materials to provide concrete of same type or class as original concrete. Place, compact, and finish to blend with adjacent finished concrete. Cure in same manner as adjacent concrete.

- D. Perform structural repairs with prior acceptance of Architect for method and procedure, using specified epoxy adhesive and mortar.
- E. Repair methods not specified above may be used, subject to acceptance of Engineer.

3.15 QUALITY CONTROL TESTING DURING CONSTRUCTION

- A. General: Orange County will employ a testing laboratory to perform tests and to submit test reports.
- B. Sampling and testing for quality control during placement of concrete may include the following, as directed by Engineer.
- C. Sampling Fresh Concrete: ASTM C 172, except modified for slump to comply with ASTM C 94.
 - 1. Slump: ASTM C 143; one test at point of discharge for each day's pour of each type of concrete; additional tests when concrete consistency seems to have changed.
 - 2. Air Content: ASTM C 173, volumetric method for lightweight or normal weight concrete; ASTM C 231 pressure method for normal weight concrete; one for each day's pour of each type of air-entrained concrete.
 - 3. Concrete Temperature: Test hourly when air temperature is 40 deg F (4 deg C) and below, when 80 deg F (27 deg C) and above, and each time a set of compression test specimens is made.
 - 4. Compression Test Specimen: ASTM C 31; one set of 4 standard cylinders for each compressive strength test, unless otherwise directed. Mold and store cylinders for laboratory-cured test specimens except when field-cure test specimens are required.
 - 5. Compressive Strength Tests: ASTM C 39; one set for each day's pour exceeding 5 cu. yds. plus additional sets for each 50 cu. yds. more than the first 25 cu. yds. of each concrete class placed in any one day; one specimen tested at 7 days, two specimens tested at 28 days, and one specimen retained in reserve for later testing if required.
 - 6. When frequency of testing will provide fewer than 5 strength tests for a given class of concrete, conduct testing from at least 5 randomly selected batches or from each batch if fewer than 5 are used.
 - 7. Strength level of concrete will be considered satisfactory if averages of sets of three consecutive strength test results equal or exceed specified compressive strength, and no individual strength test result falls below specified compressive strength by more than 500 psi.
- D. Test results will be reported in writing to Architect, Structural Engineer, Ready-Mix Producer, and Contractor within 24 hours after tests. Reports of compressive strength tests shall contain the project identification name and number, date of concrete placement, name of concrete testing service, concrete type and class, location of

concrete batch in structure, design compressive strength at 28 days, concrete mix proportions and materials, compressive breaking strength, and type of break for both 7-day tests and 28-day tests.

- E. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted but shall not be used as the sole basis for acceptance or rejection.
- F. Additional Tests: The testing service will make additional tests of in-place concrete when test results indicate specified concrete strengths and other characteristics have not been attained in the structure, as directed by Architect. Testing service may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C 42, or by other methods as directed. Contractor shall pay for such tests when unacceptable concrete is verified.

END OF SECTION